

## **Simultaneous adsorption and biodegradation of reactive dyes using jatropha deoiled cakes**

PARTHIBAN, P., GOKULAKRISHNAN, V., GOEL, M., ASTHANA, Abhishek and DAS, A.

Available from Sheffield Hallam University Research Archive (SHURA) at:

<https://shura.shu.ac.uk/25563/>

---

This document is the Published Version [VoR]

### **Citation:**

PARTHIBAN, P., GOKULAKRISHNAN, V., GOEL, M., ASTHANA, Abhishek and DAS, A. (2019). Simultaneous adsorption and biodegradation of reactive dyes using jatropha deoiled cakes. International Journal of Innovative Technology and Exploring Engineering, 8 (12), 3246-3250. [Article]

---

### **Copyright and re-use policy**

See <http://shura.shu.ac.uk/information.html>

# Simultaneous Adsorption and Biodegradation of Reactive Dyes using Jatropha Deoiled Cakes

Parthiban P, Gokulakrishnan V, Mukesh Goel, Abhishek Asthana, Ashutosh Das

**Abstract:** Endemic pollution problems due to discharge of wastewaters are affecting all the aspects of human life. The poor quality effluents coming from industries is destroying the fragile ecosystem, leading to various apprehensions amongst researchers and scientific communities. Treatment of wastewaters have become an urgent need of the society, which cannot be ignored. Incineration, absorption on solid matrices and biological treatment are some of the effluent treatment methods available. These methods, however, have their own disadvantages. This work explores the application of jatropha deoiled cakes on the concurrent adsorption and biological degradation of reactive dyes. Reactive blue, reactive yellow, reactive red were used for the experiments. The combined experiments were tested for effect of glucose concentrations as well as initial concentrations. Glucose concentrations of 1 g/l, 2 g/l and 3 g/l were taken. All the dyes were varied from 100 ppm to 600 ppm. It was observed that combined degradation yielded higher degradation compared to biological degradation alone. The degradation rate varied with the variation of glucose concentration and it also varied with the initial concentration.

**Keywords:** Biological Degradation, Jatropha Deoiled Cakes, Reactive Dyes, Simultaneous Adsorption

## I. INTRODUCTION

Water is the primary component of all essential social and economic procedures. Due to the growth of consumer society, dangerous chemicals are generated in vast amounts throughout the globe. The issues arising from the toxicological impacts of these organic compounds must be resolved for the benefit of society as a whole. The issue is definitely complicated, and it is essential that novel processes are needed to cope with this wide spectrum of problems. The scenario is alarming due to the absence or insufficiency of appropriate wastewater treatment techniques capable of decreasing toxic substances that currently pose a constant chemical threat. There are extensive treatment technologies for sewage, distillery and so on that contain biodegradable organics, but not so much for toxic effluents that contain xenobiotic compounds that are often non-biodegradable or only partly biodegradable.

When a gas or liquid solute accumulates on the surface of a solid or a liquid, forming a film can be referred as adsorption.

Revised Manuscript Received on October 05, 2019.

**Parthiban P.**, Centre for Environmental Engineering, PRIST Deemed University, Thanjavur, India. Email: drparthi2009@gmail.com

**Gokulakrishnan V.**, Centre for Environmental Engineering, PRIST Deemed University, Thanjavur, India. Email: ceeprist@gmail.com

**\*Mukesh Goel**, Department of Engineering and Mathematics, Sheffield Hallam University, S1 1WB

**Abhishek Asthana\***, Department of Engineering and Mathematics, Sheffield Hallam University, S1 1WB

**Ashutosh Das**, Centre for Environmental Engineering, PRIST Deemed University, Thanjavur, India. Email: scientistsrd@gmail.com

Biological treatment processes are designed to remove the biodegradable content of the wastewaters. Biological treatment process uses different microorganisms (i.e., algae, fungi, and bacteria) to degrade organics. Biological processes are the most adaptable method for wastewater treatment. These are eco-friendly and also economically feasible. They possess the capability of degrading a range of compounds, including PAHs, explosives, chlorinated organics, etc. However, toxic chemicals treatments are not feasible as clean water seems to have appreciable concentration of these chemicals. Hence, it becomes necessary to develop effective technologies to remove these toxic compounds. This work proposes simultaneous adsorption and biological degradation of different dyes using Jatropha deoiled cake as an adsorbent.

## II. MATERIALS AND METHODS

### i) Compounds selected for Experiments

The following Reactive dyes (Blue, Yellow and Red) were obtained from Merck India.

### ii) Microorganism and its development

This study involves only mixed cultures for degradation of toxic chemicals. The mixed cultures were developed from wastewater samples collected from a local sewage treatment plant (STP) near Vallam, Thanjavur.

The mixed culture was maintained with a medium containing glucose as the source of carbon. The mixed culture was maintained at 4°C. The sub culturing period was 7 days.

The cultures were acclimatized to all the chemicals for 2 to 4 weeks before experimentation. Figure 1 shows the mixed culture used in the experiments.



Figure 1. Mixed cultures used

The media concentration were kept same throughout the study whereas the concentration of glucose and the nutrients were varied according to the requirements.

### iii) Adsorbents and their preparation

Jatropha Deoiled Cakes (JDC) were collected from Bannari Amman sugar mills, Sathyamangalam, Erode.

They were dried overnight at 105°C in a hot air oven, followed by crushing and sieved with a 125 µm mesh. The powdered samples were dried using a desiccator and stored in airtight containers for subsequent analysis.

The dried adsorbents were impregnated with H<sub>3</sub>PO<sub>4</sub> in the ratio of 1:2. The activation method involves use of 100 g of adsorbents with 120 ml of H<sub>3</sub>PO<sub>4</sub> mixed and kept overnight in room temperature. It was then kept in a muffle furnace in the presence of nitrogen atmosphere at 500°C for 2 hours. The samples so generated were washed with distilled water until the pH becomes neutral. Then the powder obtained was dried and sieved (at 125 microns) for the adsorption process.

#### iv) Preparation of Stock Solution

The stock solutions of the reactive dyes (1000 ppm) were prepared by dissolving one gram of dye in a litre of distilled water.

### III. EXPERIMENTAL PROCEDURE

Six different initial concentrations of dye were used in the experiments (100 to 600 ppm). Three different glucose concentrations (1 g/l, 2 g/l and 3 g/l) and four different temperatures (25, 30, 35 and 40°C) were used for the biological experiments. The experiments were also conducted for cultures without glucose. The experiments were run for a week. All measurements were repeated to minimise the errors. The inocula concentration was fixed at 15%.

The test experiment was constituted of media with biomass and adsorbents. Optimized adsorbent dosage would be added to test solution containing media, and biomass. A ratio of 5:1 was observed for adsorbent: chemical for dyes. For E.g., 100 ppm initial concentration of dye would have the adsorbent 50 mg in 100 mL solution. And for 600 ppm dye solution, the adsorbent added would be 300 mg.

### IV. ANALYSIS

#### A. pH

pH of all the reactors were analyzed using Water Analyzer 371.

#### B. Biomass concentration determination

The biomass concentration was measured by the optical density values. The optical density was determined from the reactors without centrifuging was recorded and multiplied with its dilution factor to arrive the Biomass concentration. The analysis was done at 600 nm using a Double Beam Spectrophotometer (Make: Systronics, Model: 2202)

#### C. Spectrophotometric measurement of Dyes

The three reactive dyes (red, blue and yellow) were taken at different concentration and their optical densities obtained by UV-spectrophotometer (Make: Labinda, Model: 3100) were estimated at respective wavelengths (Table 1). A calibration curve was obtained between optical density and concentration for each of the dye, which were found to be linearly dependent. A calibration equation was generated from calibration curve for all the dyes.

Table 1 Measuring wavelength for the dyes

S.No	Dyes	Wavelength (nm)	R <sup>2</sup>
1	Reactive Red	540	0.9965
2	Reactive Blue	614	0.9776
3	Reactive Yellow	418	0.9994

#### D. Chemical Oxygen Demand

Chemical oxygen demand was measured using Hach Colorimeter (DR 890) and HACH COD digester. The COD solution (HR grade – 0-1500 ppm) was prepared by mixing 0.25 ml of COD solution A and 2.8 ml of COD solution B. Before keeping for digestion in the COD reactor, 2 ml of centrifuged sample was added. The digestion was done at 150°C for two hours using COD vials. The COD values were recorded.

### V. RESULTS AND DISCUSSIONS

#### i) Effect of glucose concentration

Simultaneous removal of dyes for integrated treatment at different glucose concentrations (0 g/l, 1 g/l, 2 g/l and 3 g/l) were tested. It was compared with biodegradation alone. COD removal data for the dyes (RB, RY, and RR) are presented in Figures 2, 3 and 4 for biodegradation.

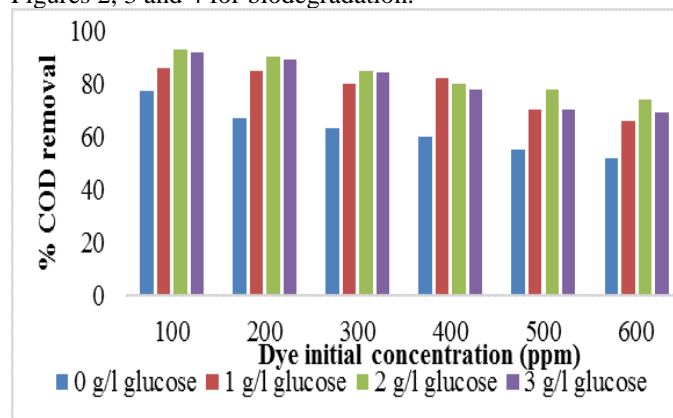


Figure 2. COD removal of Reactive Blue dye

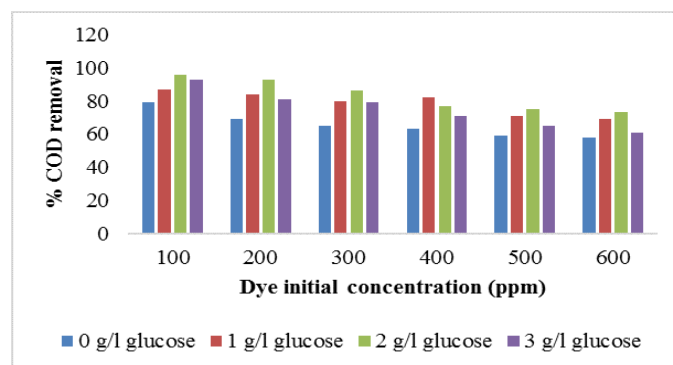


Figure 3. % COD removal of Reactive Red

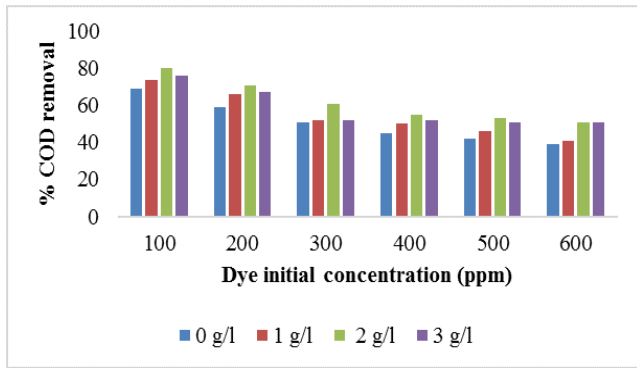


Figure 4. % COD removal of Reactive yellow

The combined treatment using adsorption and biological treatment was conducted in simultaneous mode. Both adsorption and biodegradation were tested simultaneously. COD removal data for the dyes (RB, RY, and RR) are presented in Figures 5, 6 and 7 for biodegradation in simultaneous mode.

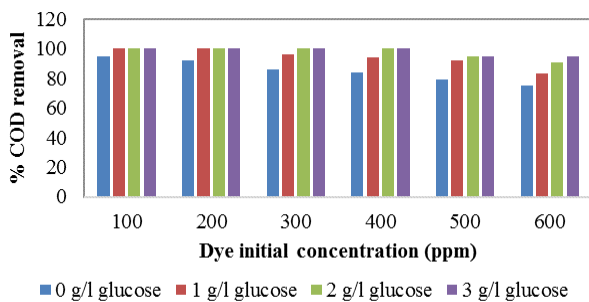


Figure 5. Biodegradation of Reactive Blue in simultaneous mode

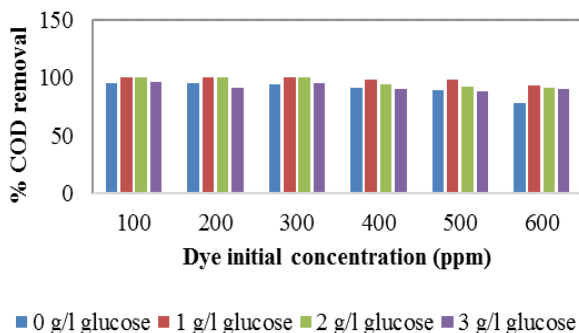


Figure 6. Biodegradation of Reactive Red in simultaneous mode

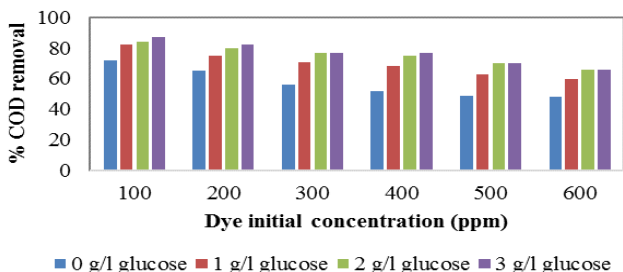


Figure 7. Biodegradation of Reactive Yellow in simultaneous mode

Another parameter, % point change (Pp) was used to compare integrated treatment with biodegradation alone. It shows the increase in degradation with respect to biological treatment (Fig. 8, 9 and 10). It is the ratio of difference

between integrated reduction and biological reduction divided by biological reduction. Higher is the Pp value, higher is the efficiency of the integrated process.

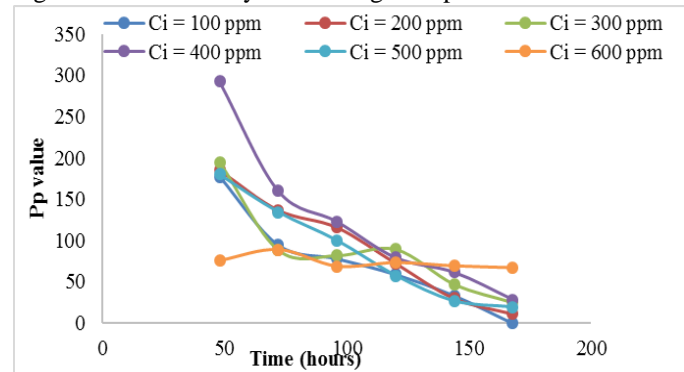


Figure 8. Percentage point change in Reactive Blue at different initial concentrations

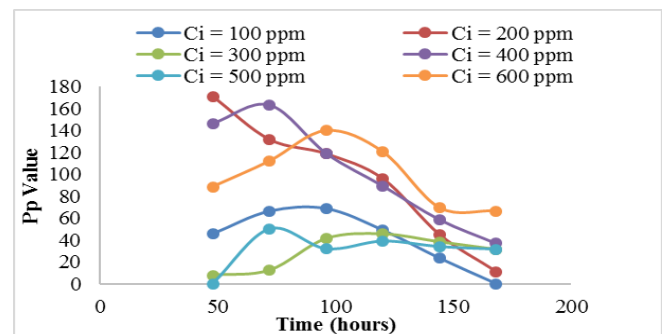


Figure 9. Percentage point change in Reactive Red at different initial concentrations

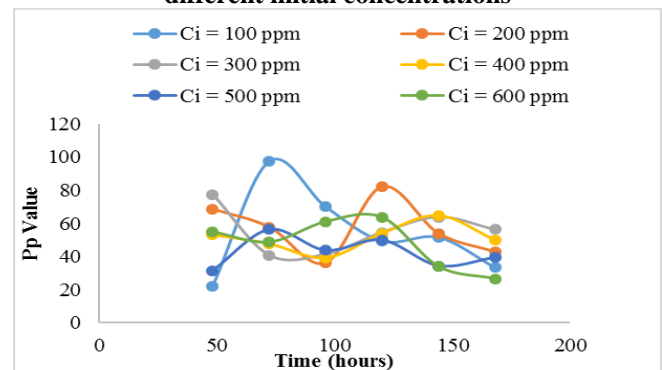


Figure 10. Percentage point change in Reactive Yellow at different initial concentrations

It was found that COD removal increased gradually from no glucose to 1 g/l glucose concentration for reactive blue. It was 75% for no glucose, which increased to 83% for 1 g/l. It further increased to 91% for 2 g/l and 95% for 3 g/l glucose. Reactive Red, on the other hand presented mixed variations, as COD removal showed 78% at 0 g/l to 93% at 1 g/l. It could be that substrate inhibition is being demonstrated here, but was less profound than that observed for biodegradation alone.



## ii. Effect of initial concentration

Experiments were conducted on the influence of initial concentration in simultaneous adsorption and biodegradation process. As mentioned earlier, both biodegradation and adsorption was conducted in the same reactor. It can be noted that simultaneous degradation has been very effective in degrading the dyes. 100 ppm RB solution was completely degraded in three days and higher concentrations (600 ppm) was degraded by the end of seven days. The degradation rate was much faster than that of biodegradation alone. The Pp value was observed to increase with increase in concentration. At 200 ppm, Pp value was 19%, which increased to 48% for 300 ppm of RR solution. At high concentration, biological degradation is not so effective since microbes are more susceptible to toxicity effects. Though there is an increased substrate concentration for them, the dyes are not biogenic substrates and hence have the potential to interfere with the microbial metabolism (Goel et al., 2009). Even though, there is an increase in Pp value, many non-biodegradable components may still be present, which would be difficult to degrade. Simultaneous mode promotes more biodegradability by adsorbing non-biodegradable compounds (Seo et al., 2001; Orozco et al., 2008). This is a favorable situation for biodegradation as microbes could grow faster by consuming biogenic substrates and thus increase the rate of biodegradation of dyes and other chemicals. These results are important as the presence of bio-refractory materials hindered the biological degradation rate. However, biological treatment processes are most versatile and economical, the bio-refractory materials inhibit the biological activity of microorganisms (Goel et al., 2010). Therefore, a combination of biological and physico-chemical process is more effective.

The effects of initial concentrations are further compared using mineralization data. In case of RB, biodegradation alone could yield only 76% COD removal for 600 ppm solution, but a high COD removal of 100% was observed for simultaneous mode. Individual chemical degradation is much easier in most of the processes, but COD removal or mineralization is more complicated. The degradation of individual chemicals generate plenty of intermediates, and sometimes they are much more recalcitrant than parent chemicals (Goel et al., 2010). It can be noted that all the dyes showed marginal to significant increase in COD removal when conducted in simultaneous mode.

## VI. CONCLUSION

- Simultaneous adsorption and biological degradation was conducted for all the chemicals and effect of glucose concentration and initial concentration was tested.
- It was observed that increase in glucose concentration increased the COD removal for all the chemicals, though, there were some exceptions. Reactive blue and reactive red both yielded 91% COD removal for 600 ppm dye solution.
- An innovative and novel process like simultaneous adsorption using deoiled cakes is more successful in degrading the toxic chemicals compared to conventional treatment methods.

## ACKNOWLEDGMENT

The authors acknowledge Dept. of Science and Technology (DST): SUTRAM FOR EASY WATER (DST/TM/WTI/WIC/2K17/82(G)) for financial support for carrying out this research.

## REFERENCES

1. Arulanandam Xavier., and Pandi Muthuraman. (2015) "Adsorption of Reactive Green and Reactive Red Dyes from the Aqueous Solution using Activated Carbons", *International Journal of Science and Research*. 4(9): 454-459.
2. Asad S., Amoozegar MA., Pourbabae AA., Sarbolouki MN., and Dastgheib SMM. (2007) "Decolorization of textile azo dyes by newly isolated halophilic and halotolerant bacteria", *Bioresour. Technol.* 98: 2082- 2088.
3. Ashutosh Das., Subramanyam B., Mukesh Goel., Ram Kiran B., Sudharshan K., and Ravi Kumar K. (2015) "Alternative usage of edible deoiled cake for decolonization of Reactive Red dye", *Desalination and Water Treatment*. 53(10): 2720-2726.
4. Aslam, M.M., Malik, M., Baig, M.A., Qazi, I.A., and Iqbal, J. (2007) "Treatment Performances of Compost Based and Gravel Based Vertical Flow Wetlands Operated Identically for Refinery Wastewater Treatment in Pakistan", *Ecological Engineering*; 30:34-42.
5. Anantha Narayanan P., Ishwarya V., Mukesh Goel., and Ashutosh Das. (2018) "Performance of Combined Adsorption and Biological Process in Decolorization and Demineralization of Dye Wastewater" *Nature Environment and Pollution Technology*. 17(1): 117-121.
6. Beenish Saba., Madeeha Jabeen., Tariq Mahmood., and Irfan Aziz. (2014) "Treatment Comparison Efficiency of Microbial Amended Agro-waste Biochar Constructed Wetlands for Reactive Black Textile Dye", *International Proceedings of Chemical, Biological & Environment*. 65: 13.
7. Calheiros, S.C., Rangel, A., and Castro, P. (2007) "Constructed Wetland Systems Vegetated with Different Plants for the Treatment of Tannery Wastewater", *Water Research*. 41: 1790-1798.
8. Daneshvar N., Ayazloo M., Khataee A. R., and Pourhassan M. (2007) "Biological decolorization of dye solution containing Malachite Green by microalgae *Cosmarium* sp", *Bioresource Technology*. 98(6): 1176-1182.
9. Deng, J., Shao, Y., Gao, N., Xia, S., Tan, C., Zhou, S., and Hu, X. (2013) "Degradation of the antiepileptic drug carbamazepine upon different UV-based advanced oxidation processes in water", *Chem. Eng. J.* 222: 150-158.
10. Edris Bazrafshan., Ferdos Kord Mostafapour., Ali Reza Hosseini., Ataolah Raksh Khorshid., and Amir Hossein Mahvi. (2013) "Decolorisation of Reactive Red 120 Dye by Using Single-Walled Carbon Nanotubes in Aqueous Solutions", *Journal of Chemistry*. Article ID 938374, 8 pages. <http://dx.doi.org/10.1155/2013/938374>
11. Forgacs, E., Cserháti, T., and Oros, G. (2004) "Removal of synthetic dyes from wastewaters: a review", *Environment International*. 30: 953.
12. Gali SV., Kumar P., and Mehrotra I. (2005) "Treatment of phenol and cresols in upflow anaerobic sludge blanket (UASB) process: a review", *Water Res.* 39: 154-170.
13. Gallizia, I., McClean, S., and Banat, I. (2003) "Bacterial biodegradation of phenol and 2, 4-dichlorophenol", *Journal of Chemical Technology and Biotechnology*. 78: 959-963.
14. Goel, M., Chovelon, J., Ferronato, C., Bayard, R., and Sreekrishnan, T.R. (2010) "The remediation of wastewater containing 4-chlorophenol using integrated photocatalytic and biological treatment", *Journal of photochemistry and photobiology. B, Biology*. 98(1): 1-6.
15. Goel, Mukesh., and Seepana, Murali Mohan. (2016) "Photochemical Removal of Pesticides: A Review", *Materials Science Forum*. 855: 127-138. [10.4028/www.scientific.net/MSF.855.127](https://doi.org/10.4028/www.scientific.net/MSF.855.127).
16. Han, J., Liu, Y., Chang, C., Chen, B., Chen, W., and Xu, H. (2010) "Exploring characteristics of bioelectricity generation and dye decolorization of mixed and pure bacterial cultures from wine-bearing wastewater treatment", *Biodegradation*. 22: 321-333.
17. Irfan Nausath., Mukesh Goel., Arul Prakash., Soundaryan R., Alagar Raj., and Ravikumar Kanapuram. (2015) "The Potential of Using Low Cost Naturally Available Biogenic Substrates for Biological Removal Of Chlorophenol", *Bioresource Technology*. (SCI - 5.5), 196: 707-711.

18. Michałowicz, J. and Duda, R.O.W. (2005) "Analysis of Chlorophenols, Chlorocatechols, Chlorinated Methoxyphenols and Monoterpenes in Communal Sewage of ŁÓDŹ and in the Ner River in 1999–2000", *Water Air Soil Pollut.* 164: 205. <https://doi.org/10.1007/s11270-005-3022-7>.
19. Mukesh Goel., Ramesh M., Sreekrishnan T.R. (2009) "Mixed culture acclimatization and biodegradation of Chlorophenols in Shake Flasks: Effect of the Inoculum Source", *Practice Periodical of Hazardous, Toxic and Radioactive Waste Management.* 13(1): 29-34.
20. Obaid, M.K., Abdullah, L.C., and Idan, I.J. (2016) "Removal of Reactive Orange 16 Dye from Aqueous Solution by Using Modified Kenaf Core Fiber", *Journal of Chemistry.* Article ID 4262578, <http://dx.doi.org/10.1155/2016/4262578>.
21. Naidu L. D., Saravanan S., Chidambaram M., Mukesh Goel, Ashutosh Das, and Sarat Chandra Babu J. (2015) "Nanofiltration in Transforming Surface Water into Healthy Water: Comparison with Reverse Osmosis", *Journal of Chemistry.* Article ID 326869, 6 pages, <http://dx.doi.org/10.1155/2015/326869>.
22. Seo, G.T. and Ohgaki, S. (2001) "Evaluation of refractory organic removal in combined biological powdered activated carbon – microfiltration for advanced wastewater treatment", *Water Sci. Technol.* 43(11): 67–74.
23. Vander Zaag, R.; Chase, R.W.; and Hammerschmidt, R. (1985) "The effect of hypochlorite wash treatments on potato suberization". *American Potato Journal.* 62(8): 409-418.
24. Orozco, A.M.F., Contreras, E.M., and Zaritzky, N.E. (2008) "Modelling Cr (VI) removal by a combined carbon activated sludge system", *J. Hazardous Matter.* 150(1): 46–52.