

A local lattice Boltzmann method for multiple immiscible fluids and dense suspensions of drops

SPENCER, Timothy <<http://orcid.org/0000-0003-1135-4042>>, HALLIDAY, Ian <<http://orcid.org/0000-0003-1840-6132>> and CARE, Chris

Available from Sheffield Hallam University Research Archive (SHURA) at:

<http://shura.shu.ac.uk/3417/>

This document is the author deposited version. You are advised to consult the publisher's version if you wish to cite from it.

Published version

SPENCER, Timothy, HALLIDAY, Ian and CARE, Chris (2011). A local lattice Boltzmann method for multiple immiscible fluids and dense suspensions of drops. *Philosophical transactions. Mathematical, physical, and engineering sciences*, 369 (1944), 2255-2263.

Copyright and re-use policy

See <http://shura.shu.ac.uk/information.html>

A local lattice Boltzmann method for multiple immiscible fluids and dense suspensions of drops

BY TIMOTHY J SPENCER, IAN HALLIDAY AND CHRIS M CARE

*Materials and Engineering Research Institute, Sheffield Hallam University,
Howard Street, Sheffield S1 1WB, UK*

The lattice Boltzmann method (LBM) for computational fluid dynamics benefits from a simple, explicit, completely local computational algorithm making it highly efficient. We extend LBM to recover hydrodynamics of multi-component immiscible fluids, whilst retaining a completely local, explicit and simple algorithm. Hence, no computationally expensive lattice gradients, interaction potentials or curvatures, that use information from neighbouring lattice sites, need be calculated, which makes the method highly scalable and suitable for high performance parallel computing. The method is analytic and is shown to recover correct continuum hydrodynamic equations of motion and interfacial boundary conditions. This LBM may be further extended to situations containing a high number ($O(100)$) of individually immiscible drops. We make comparisons of the emergent non-Newtonian behaviour with a power-law fluid model. We anticipate our method will have a range applications in engineering, industrial and biological sciences.

Keywords: lattice Boltzmann, multi-component flow, deformable suspension, channel flow, power-law fluid

1. Introduction

The LBM (Succi, 2001) solves a minimal form of the differential kinetic Boltzmann equation for a mesoscopic particle distribution function (PDF) whose result matches the continuum Navier-Stokes equations. The LBM numerical scheme is a simple two-step algorithm, consisting of PDF collision and then streaming with several noteworthy differences from traditional schemes (Succi, 2001). Amongst these, we highlight that the collision step and all hydrodynamic quantities of interest (pressure, velocity, shear rate, stress) are computed locally, on a grid node, avoiding any need for (i) data communication between nodes and (ii) solving a Poisson equation for pressure. Boundary conditions are readily implemented, from simple, local, microscopic rules. LBM, then, is a high performance, $O(2)$ accurate, simple, explicit, parallel, algorithm scalable to $> 10^5$ processing cores (Bernaschi *et al.*, 2009) which opens-up many new avenues in applied computational science.

LBMs for multi-component flows have popularly been taken up. Benefitting from some of LBM's intrinsic features, various multi-component lattice Boltzmann (MCLB) models exist. Briefly, we note only the more popular (original) variants. The method of Shan & Chen (1993) uses a microscopic interaction potential to model phase changes and interfacial tension behaviour. The method of Swift *et al.* (1995) rests upon a total free energy, consisting of Landau phase transition terms and surface tension terms, after Cahn-Hilliard theory. The method of Lee

& Fischer (2006) uses another variant of the Cahn-Hilliard approach, combining a potential form of the free energy and a high order finite differencing scheme. The method by Gunstensen *et al.* (1991), evolves earlier lattice gas automata models, and has sharp-interfacial immiscibility (a source of lattice pinning error) but an appropriate interfacial tension may be directly imposed. The model of Halliday *et al.* (2007) similarly assumes arrested coalescence and immiscibility, but uses a diffuse interface, with directly imposed interfacial tension.

Of these MCLB models, methods Shan & Chen (1993); Swift *et al.* (1995); Lee & Fischer (2006) are useful in problems where phase separation kinematics features, whereas the methods of Gunstensen *et al.* (1991); Halliday *et al.* (2007) avoid these calculations, by considering completely phase-separated, isothermal systems. Only the method of Lee & Fischer (2006) is free from so-called spurious velocities due, in main, to its appropriate, non-local, treatment of both directional and non-directional derivatives separately. This does not exclude the use of the alternative schemes, rather, it limits their use to cases in which the hydrodynamic velocity is larger than any spurious velocities.

The common feature of all MCLB models, and indeed many other multi-component numerical methods, is that they calculate gradient terms, ranging from first to third order, which require information from neighbouring lattice nodes and, sometimes, additional sweeps of the underlying lattice algorithm, which discards some of the key advantages of the LBM concept, in which computations were local.

Here, we aim to demonstrate a new MCLB method that retains this advantage of core LBM, namely, local computations and an efficiently scaling parallel algorithm. Previously a method by Santos *et al.* (2003) had developed a local MCLB method based on the concept of field mediators, however, the method contains a velocity dependent interfacial tension whereas in the proposed model we avoid this and develop, possibly, a simpler algorithm. Our method is based on the isothermal MCLB method of Halliday *et al.* (2007), which has been shown to be analytically tractable, to recover the results of analytical calculations of interfacial deformation (Halliday *et al.*, 2009), to accommodate extra force terms to allow moderate density ratio and viscosity ratio mixtures (Lischuk *et al.*, 2008) and to accommodate dynamic wetting conditions (Hollis *et al.*, 2010). We then apply this new method to study emergent, non-Newtonian properties in suspensions of deformable particles, in a channel flow.

2. A local MCLB method

Following Halliday *et al.* (2007), the LBM PDF, $f_i(\underline{x}, t)$, is split into separate PDFs, each representing a different fluid type: $f_i^0(\underline{x}, t)$, $f_i^1(\underline{x}, t)$, \dots , $f_i^{T-1}(\underline{x}, t)$. Here the superscript indexes fluid type (species or colour). It should not be confused with orders of a Chapman-Enskog expansion. The subscript refers to the usual lattice links (Succi, 2001), \underline{x} is the discrete lattice co-ordinate, t the discrete time and T the number of different fluid species.

For now, let $T = 2$. The total *colour-blind* PDF is $f_i(\underline{x}, t) = f_i^0(\underline{x}, t) + f_i^1(\underline{x}, t)$ and the macroscopic observables of species density, total density and momentum are $\rho^0 = \sum_i f_i^0(\underline{x}, t)$, $\rho^1 = \sum_i f_i^1(\underline{x}, t)$, $\rho = \rho^0 + \rho^1$, $\rho u_\alpha = \sum_i f_i(\underline{x}, t) c_{i\alpha}$ where \underline{c}_i is the lattice link velocity. We also define a local phase field $\rho_N^{01} = \frac{\rho^0 - \rho^1}{\rho^0 + \rho^1}$.

The colour-blind, PDF undergoes a collision rule with a source or force term, $F_i(\underline{x}, t)$. We present here, for definiteness, the BGK collision dynamics (other mod-

els, like the multi-relaxation time and incompressible models equally work)

$$\tilde{f}_i(\underline{x}, t + \Delta t) = f_i(\underline{x}, t) - \frac{1}{\tau + 1/2} (f_i(\underline{x}, t) - f_i^{(eq)}(\underline{x}, t)) + \Delta t F_i(\underline{x}, t), \quad (2.1)$$

where $\tilde{f}_i(\underline{x}, t + \Delta t)$ represents the post collision, pre-segregation state, τ is the combined fluids' dimensionless relaxation time, Δt is the time step, and $f_i^{(eq)}$ is defined as

$$f_i^{(eq)}(\underline{x}, t) = \rho t_i \left(1 + \frac{c_{i\alpha} u_\alpha}{c_s^2} + \frac{(c_{i\alpha} c_{i\beta} - c_s^2 \delta_{\alpha\beta})}{2c_s^4} u_\alpha u_\beta \right), \quad (2.2)$$

in which t_i and c_s^2 are lattice specific weights (see Succi (2001)).

The force term, defined later, is chosen to impose the Laplace law pressure step. The collided distribution function, equation (2.1), then undergoes segregation and propagation

$$\left. \begin{aligned} f_i^0(\underline{x} + \underline{c}_i \Delta t, t + \Delta t) &= \frac{\rho^0}{(\rho^0 + \rho^1)} \tilde{f}_i(\underline{x}, t + \Delta t) + \Delta t \beta^{01} t_i \frac{\rho^0 \rho^1}{(\rho^0 + \rho^1)^2} \hat{n}_\alpha^{01} c_{i\alpha}, \\ f_i^1(\underline{x} + \underline{c}_i \Delta t, t + \Delta t) &= \frac{\rho^1}{(\rho^0 + \rho^1)} \tilde{f}_i(\underline{x}, t + \Delta t) - \Delta t \beta^{01} t_i \frac{\rho^0 \rho^1}{(\rho^0 + \rho^1)^2} \hat{n}_\alpha^{01} c_{i\alpha}, \end{aligned} \right\} \quad (2.3)$$

in which \hat{n}^{01} is the interfacial unit normal vector (UNV) between fluid species 0 and 1, and β^{01} is a constant related to the interface. Note, product $\frac{\rho^0 \rho^1}{(\rho^0 + \rho^1)^2}$ is evaluated only in the interfacial region, $\hat{n}^{01} = -\hat{n}^{10}$ and all quantities on the right hand side of equation (2.3) are local to the lattice node. The detailed properties of the analytic fluid segregation rules, equation (2.3), have been analysed in Halliday *et al.* (2007). Its principal advantages over other segregation methods such as Tolke *et al.* (2002) and Gunstensen *et al.* (1991) are that interfaces are isotropic, the dynamics of the phase field are appropriate and lattice pinning effects are eliminated. However the cost is a more diffuse interface. For a flat interface centred on x_c , with $\hat{n}^{01} = \hat{e}_x$ equation (2.3) gives rise to density profiles

$$\rho^0 = \frac{\rho}{2} \left[\tanh \left(\frac{\beta^{01}}{\rho} (x - x_c) \right) \right], \quad \rho^1 = \frac{\rho}{2} \left[\tanh \left(-\frac{\beta^{01}}{\rho} (x - x_c) \right) \right] \quad (2.4)$$

from which we see β^{01} controls interface width, L^{01} , and has units of mass per unit length. Importantly we note that for this form of segregation rule we can write $\partial_\alpha \rho_N^{01} = \frac{4\beta^{01}}{\rho} \frac{\rho^0 \rho^1}{(\rho^0 + \rho^1)^2} \hat{n}_\alpha^{01} = \frac{\beta^{01}}{\rho} (1 - (\rho_N^{01})^2) \hat{n}_\alpha^{01}$.

Returning to the force term, $F_i(\underline{x}, t)$, we require this to effect a Laplace pressure step (ΔP) across an interface, proportional to the fluids' interfacial tension (σ^{01}) and mean radius of curvature ($K^{01} = -\nabla \cdot \hat{n}^{01}$). To obtain the necessary curvature unfortunately involves non-local gradients, note. In Halliday *et al.* (2007), an interface force $\frac{1}{2} \sigma^{01} K^{01} \nabla \rho_N^{01}$ is calculated directly, input into the LBM body force term, $F_i(\underline{x}, t)$, and effectively imposed through its first moment. To eliminate the explicit calculation of the curvature we choose to impose the force in the second moment of the LBM force term only by using a novel form

$$F_i(\underline{x}, t) = \frac{t_i}{2c_s^2} A^{01} \frac{\rho^0 \rho^1}{(\rho^0 + \rho^1)^2} (\hat{n}_\alpha^{01} \hat{n}_\beta^{01} - \delta_{\alpha\beta}) (c_{i\alpha} c_{i\beta} - c_s^2 \delta_{\alpha\beta}). \quad (2.5)$$

Here A^{01} is proportional to the emerging interfacial tension that is also effected by the β^{01} parameter and, as with equation (2.3), all quantities are local to the lattice node. We note this form of F_i does not require redefinition of the velocity moment, which is the case in most other MCLB methods. Also, we retain a simple equation of state for the pressure field, adding to the simplicity of this method. Summarising, the moments of equation (2.5) are

$$\sum_i F_i(\underline{x}, t) = 0, \quad \sum_i F_i(\underline{x}, t)c_{i\alpha} = 0, \quad \sum_i F_i(\underline{x}, t)c_{i\alpha}c_{i\beta} = \Delta\sigma_{\alpha\beta} \quad (2.6)$$

Taking the divergence of the second moment, above, results in a Laplace or capillary force term close to that first used and derived by Lafaurie *et al.* (1994). One interpretation of this expression is as a bulk pressure perturbation in the vicinity of the interface and projected onto the interfacial surface.

Executing a Chapman-Enskog analysis for mass, momentum (Guo *et al.*, 2002) and phase fields (Halliday *et al.*, 2007) identifies the continuum transport equations on standard LBM lattices (Succi, 2001) and up to second order in the velocity as

$$\partial_t(\rho) + \partial_\alpha(\rho u_\alpha) = 0, \quad (2.7)$$

$$\partial_t(\rho u_\alpha) + \partial_\beta(\rho u_\alpha u_\beta) = -\partial_\beta(\rho c_s^2)\delta_{\alpha\beta} + 2\Delta t \rho c_s^2 \tau \partial_\beta S_{\alpha\beta} - \Delta t(\tau + \frac{1}{2})\partial_\beta \Delta\sigma_{\alpha\beta}, \quad (2.8)$$

$$D_t \rho_N^{01} = \frac{\Delta t}{2\rho} \partial_\alpha (\rho_N^{01} [\partial_\alpha(\rho c_s^2) - F_\alpha]), \quad (2.9)$$

where $S_{\alpha\beta} = \frac{1}{2}(\partial_\alpha u_\beta + \partial_\beta u_\alpha)$ and the transport coefficients and pressure are

$$\eta = \rho \Delta t c_s^2 \tau, \quad \sigma^{01} = \frac{\Delta t c_s^2 \rho A^{01}(\tau + 1/2)}{2\beta^{01}}, \quad P = \rho c_s^2, \quad L^{01} = \frac{2\pi\rho}{\beta^{01}}. \quad (2.10)$$

Here we note the LBM force term appearing on the right hand term of equation (2.8) can be viewed in two ways. First, by inserting equation (2.6) and making use of the product rule, it is straightforward to show it represents a force $F_\alpha = \frac{\sigma^{01}}{2} K^{01} \partial_\alpha \rho_N^{01}$, identical to the force expression used in Halliday *et al.* (2007). Second, quantity $\Delta\sigma_{\alpha\beta}$ may be viewed as a stress perturbation and, as such, should obey interfacial kinematic boundary conditions $\hat{n}_\alpha^{01} \Delta\sigma_{\alpha\beta}^0 \hat{n}_\beta^{01} - \hat{n}_\alpha^{01} \Delta\sigma_{\alpha\beta}^1 \hat{n}_\beta^{01} = 0$ and $\hat{t}_\alpha^{01} \Delta\sigma_{\alpha\beta}^0 \hat{n}_\beta^{01} - \hat{t}_\alpha^{01} \Delta\sigma_{\alpha\beta}^1 \hat{n}_\beta^{01} = 0$ of continuity of the fluid velocity. We note the *a priori* interfacial tension expression. A local expression for the viscous stress tensor is now given by

$$\sigma_{\alpha\beta}^{visc} = 2\eta S_{\alpha\beta} = - \left(1 - \frac{1}{2\tau + 1}\right) \sum_i c_{i\alpha} c_{i\beta} \left(f_i - f_i^{(eq)} - \Delta t(\tau + 1/2)F_i\right). \quad (2.11)$$

From equation (2.9), provided the force term generates a correct Laplace law pressure step, the term $\partial_\gamma(\rho c_s^2) - F_\gamma = 0$ and, thus, the right hand side of equation (2.9) is zero indicating the phase field is advected with the underlying fluid velocity. We also note, if using BGK collision dynamics, to reduce compressibility errors the condition $Ma = u/c_s \ll 1$ should be maintained.

To complete the MCLB method, summarised in equations. (2.1), (2.3) and (2.5), we must calculate the interfacial UNV. We show two ways in which to do this:

(i) *Non-local MCLB method*

Here standard finite differences are used to calculate the lattice gradient of the phase field, $\partial_\alpha \rho_N^{01} = \frac{1}{\Delta t c_s^2} \sum_i t_i c_{i\alpha} \rho_N^{01}(\underline{x} + \underline{c}_i \Delta t)$ which is in turn normalised, $\hat{n}_\alpha^{01} = \partial_\alpha \rho_N^{01} / |\partial_\alpha \rho_N^{01}|$. Using this method results in a reliable and robust algorithm but ultimately non-local algorithm, due to use of finite differences.

(ii) *Local MCLB method*

To approximate a local interfacial UNV (hence local MCLB behaviour) we define a meso-scale, or *link* phase field, $\rho_{iN} = (f_i^0 - f_i^1)/(f_i^0 + f_i^1)$. We then form a crude approximation to the phase field gradient $\partial_\alpha \rho_N^{01} = -\frac{1}{\Delta t c_s^2} \sum_i t_i c_{i\alpha} \rho_{iN}^{01}$. Although this is a poor approximation of the gradient it remains a good approximation to its direction. A normalisation ($\hat{n}_\alpha^{01} = \partial_\alpha \rho_N^{01} / |\partial_\alpha \rho_N^{01}|$) provides a local estimation of the interfacial UNV. Using this method together with equations. (2.1), (2.3) and (2.5) results in a completely local MCLB model with obvious advantages in parallel communication.

3. Verification of the local MCLB method

Consider a two-dimensional circular droplet of fluid species ρ^1 embedded in background fluid ρ^0 . The law of similarity is used to match key dimensionless *Reynolds* and *Weber* numbers. In hydrostatic equilibrium, the interfacial UNVs are known analytically. Relative to a polar origin at the centre of mass, $\hat{n}^{01} = (\cos(\theta), \sin(\theta))$, where θ is the angular position of the interface. Typical (percentage) error in the local method interfacial UNVs, compared to the analytic values is $\leq 1.5\%$.

The radial pressure profile shows smooth density variation across the interface, according to the Laplace law, over four decades of interfacial tension value, facilitating a wide range of materials (see Fig. 1). Using the local MCLB method increases the magnitude of the interfacial spurious velocities by a factor of three, due to the 1.5% inaccuracies in the local UNV calculation. However, we note these values still compare well with all other MCLB and numerical methods (with the exception of Lee & Fischer (2006)). All these methods should always ensure simulation velocities exceed the spurious velocity values, for their effect to be negligible and to underwrite kinematic boundary conditions.

In simulations, one should check that local UNV fields remain continuous within interfacial regions. In tests of droplet break-up and thread formation it can lead to inaccuracies in the local method from which our non-local MCLB counterpart, above, is free. However, continuum methods are known to be inaccurate for droplet break-ups involving threads of a few molecules width. Moreover, a wide range of applications that do not involve drop scission remain accessible, as we now show.

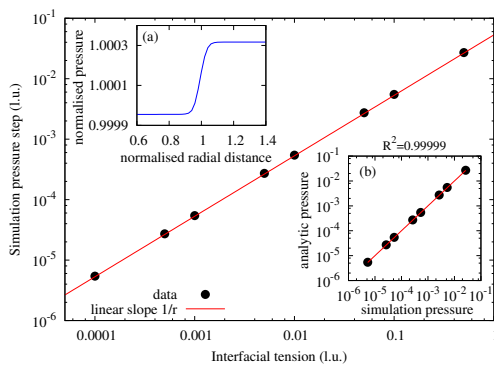


Figure 1. Online version in colour. Range of interfacial tensions recovered with the local MCLB method. Inset (a) interfacial pressure profile, (b) analytic versus numeric comparison.

4. MCLB for suspensions of deformable particles

Particle suspensions give rise to non-Newtonian flow behaviour and flows of deformable particles are less commonly studied than those of solid particles. We follow Zhou & Pozrikidis (1994) in studying a pressure driven, two-dimensional channel suspension flow of identical, deformable particles (drops). Zhou & Pozrikidis (1994) studies the effect of relatively few drops $T \leq 24$, using the computationally expensive boundary integral method. Here, we study a similar system but with a much larger range of particle numbers. We then examine emergent, non-Newtonian behaviour and compare to the well known non-Newtonian power-law fluid model. The power-law model proposes a shear-dependant shear viscosity $\eta(\dot{\gamma}) = \eta_0 \dot{\gamma}^{n-1}$ where η_0 is the consistency parameter, n is the power-law index and $\dot{\gamma}$ is the local shear rate. Despite some of the power-law model shortcomings ($\lim_{\dot{\gamma} \rightarrow 0} \eta = \infty$ and the units of η_0 are $\text{Pa}\cdot\text{s}^n$) the solution for channel flows

is analytically available for shear thinning ($n < 1$) and shear thickening ($n > 1$) fluids: $\underline{u}(y) = \left(\frac{Q}{2H} \frac{2n+1}{n+1} \left[1 - \left(\frac{|y|}{H} \right)^{1+1/n} \right], 0 \right)$, where Q is the discharge. Here we investigate the relationship of particle concentration and the power-law index.

(a) *MCLB algorithm extension for more than two fluids*

Following Dupin *et al.* (2004) we extend the two-component MCLB method of section 2 to any number of components $T \gg 2$. The principle behind this method has a PDF for each immiscible fluid species. However, to avoid excessive computational memory demands when $T > 2$, we apply an exclusion principle because, for immiscible fluids with a diffuse interface, any one location in space (lattice node) can only accommodate a critical, finite number, T_C , of fluid species. In the two dimensional systems here, this number is empirically $T_C \leq 6$. Consequently, on any link only $\leq T_C$ PDFs indexed by an associated label identifying the fluid species (which may range $1 \leq T < \infty$) are tracked. The simplest way to do this is to ensure PDFs stream onto similarly indexed lattices. The resultant algorithm's memory consumption and computational timings for $T \gg T_C$ closely approximate those with $T \approx T_C$.

(b) *High density deformable particle suspension in a channel flow*

To narrow the wide parameter space in suspension flows, we investigate a mono-disperse suspension of $T - 1$ identical immiscible deformable particles in a background fluid in a periodic channel flow driven by a fixed pressure gradient. The viscosity and density ratios between fluid species have unit value and drop-drop interfacial tension is ten times the drop-background fluid value, to mimic surfactant effects and ensure drops remain mono-disperse. The drop radius to channel half height ratio $r/H = 0.066$ and the channel aspect ratio $2H/L = 0.74$ and we use lattice values $H = 148$, $\tau = 1/2$ and $\rho = 1.8$. Relevant dimensionless numbers are the no-particle *Reynolds* $= \frac{UH}{\nu} \sim 35.5$ and *Weber* $= \frac{2\rho U^2 r}{\sigma} \sim 16.7$. The 2D particle concentration is $\phi = (T - 1)\pi r^2/2HL$. The solid walls are modelled with the half link bounce back method and the background fluid preferentially wets the walls.

Fig 2(a) shows a pseudo steady state snap-shot of the flows studied. Particle concentrations $\phi : 0 < \phi < 0.5$ where studied from an initially random arrangement of particle positions. Single particles experience lift to the channel centre line, where flow is fastest and deformation least. When ϕ is increased, all the drops vie for a central channel position and layers of particles form around the channel centre, with more central layers at higher concentration, as evidenced in the short time averaged cross-sectional averaged concentration profiles shown in Fig. 2(b). Increasing concentration decreases the particle free regions near the wall, see Fig. 2(c).

Fig 2(d) plots short time averaged velocity profiles at various concentrations. Clearly higher particle concentrations cause flow blunting. The velocity profiles can be compared to the analytic power-law solution to measure the power-law index. In Fig 2(e) we find n decreases with increasing concentration but not it tends to plateau, around $\phi \sim 0.32$. Defining the effective channel flow viscosity after Zhou & Pozrikidis (1994) as $\eta_{eff} = \eta_0 4UH/3Q$, where U is the maximum velocity in a system without particles, the effective viscosity increases with the particle concentration as shown in Fig 2(f).

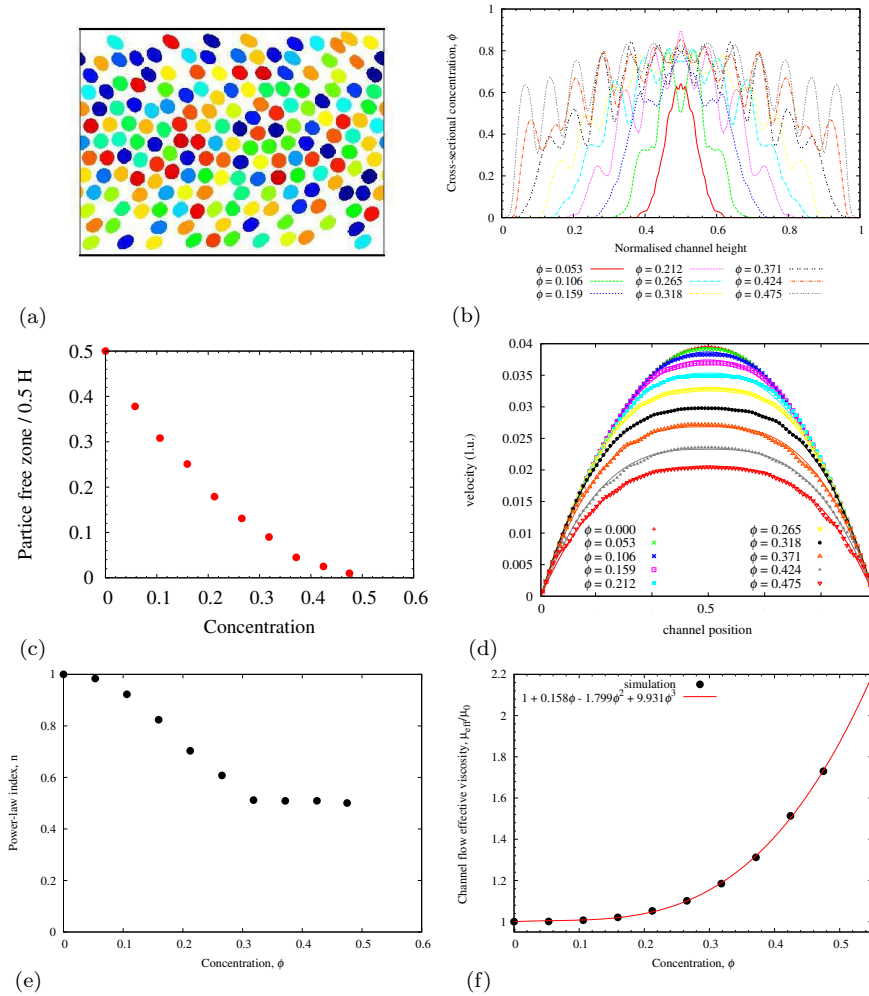


Figure 2. Online version in colour. (a) Channel flow of 180 identical deformable particles, (b) time averaged concentration profiles, (c) decreasing wall particle free region, (d) velocity profiles and power-law fitted data, (e) concentration versus power index relationship, (f) effective viscosity increase.

5. Conclusion

An isothermal, immiscible MCLB method has been developed. It is simple, explicit, analytic and local. The local computations remove the need for lattice gradients and excessive parallel communication overheads found in previous forms. Tests show this method recovers key features of immiscible multi-component fluids. Density differences between fluids were not presented but an additional force (Lischuk *et al.*, 2008) will model this. The MCLB method was extended to include arbitrary numbers of immiscible fluid species and to study high density suspensions. Channels flows of deformable particle suspensions showed emergent non-Newtonian shear thinning and particle layering at all concentrations. A relationship between a power-law fluid power index and particle concentration was explored.

This work has been supported by a research grant from BBSRC (UK) BB/F013744/1

References

- Bernaschi, M., Melchionna, S., Succi, S., Fyta, M., Kaxiras E. & Sircar, J. K. 2009 MUPHY: A parallel MUltili PHYsics/scale code for high performance bio-fluidic simulations. *Comp. Phys. Commun.* **180**, 1495. (doi:10.1016/j.cpc.2009.04.001)
- Dupin, M. M., Spencer, T. J., Halliday, I. & Care, C. M. 2004 A many-component lattice Boltzmann equation simulation for transport of deformable particles. *Phil. Trans. R. Soc. A* **362**, 1822. (doi:10.1098/rsta.2004.1422)
- Gunstensen, A. K., Rothman, D. H., Zaleski, S. & Zanetti, G. 1991 Lattice Boltzmann model of immiscible fluids. *Phys. Rev. A* **43**, 4320. (doi:10.1103/PhysRevA.43.4320)
- Guo, Z., Zheng, C. & Shi, B. 2002 Discrete lattice effects on the forcing term in the lattice Boltzmann method. *Phys. Rev. E* **65**, 046308. (doi:10.1103/PhysRevE.65.046308)
- Halliday, I., Hollis, A. P. & Care, C. M. 2007 Lattice Boltzmann algorithm for continuum multicomponent flow. *Phys. Rev. E* **76**, 026708. (doi:10.1103/PhysRevE.76.026708)
- Halliday, I., Spencer, T. J. & Care, C. M. 2009 Validation of multicomponent lattice Boltzmann equation simulations using theoretical calculations of immiscible drop shape. *Phys. Rev. E* **79**, 016706. (doi:10.1103/PhysRevE.79.016706)
- Hollis, A. P., Spencer, T. J., Halliday, I. & Care, C. M. 2010 Dynamic wetting boundary condition for continuum hydrodynamics with multi-component lattice Boltzmann equation simulation method. *Accepted in IMA J. of Appl. Math.*
- Lafaurie, B., Nardone, C., Scardovelli, R., Zaleski, S. & Zanetti, G. 1994 Modelling merging and fragmentation in multiphase flows with SURFER. *J. Comp. Phys.* **113**, 134. (doi:10.1006/jcph.1994.1123)
- Lee, T. & Fischer, P. F. 2006 Eliminating parasitic currents in the lattice Boltzmann equation method for nonideal gases. *Phys. Rev. E* **74**, 046709. (doi:10.1103/PhysRevE.74.046709)
- Lishchuk, S. V., Halliday, I. & Care, C. M. 2008 Multicomponent lattice Boltzmann method for fluids with a density contrast. *Phys. Rev. E* **77**, 036702. (doi:10.1103/PhysRevE.77.036702)
- Santos, L. O. E., Facin, P. C. & Philippi, P. C. 2003 Lattice-Boltzmann model based on foeld mediators for immiscible fluids. *Phys. Rev. E* **68**, 056302. (doi:10.1103/PhysRevE.68.056302)
- Shan, X. & Chen, H. 1993 Lattice Boltzmann model for simulating flows with multiple phases and components. *Phys. Rev. E* **47**, 1815. (doi:10.1103/PhysRevE.47.1815)
- Succi, S. 2001 *The lattice Boltzmann equation for fluid mechanics and beyond*, Oxford University Press, USA.
- Swift, M. R., Osborn, W. R. & Yeomans, J. M. 1995 Lattice Boltzmann Simulation of Nonideal Fluids. *Phys. Rev. Lett.* **75**, 830. (doi:10.1103/PhysRevLett.75.830)
- Tolke, J., Krafczyk, M., Schulz, M. & Rank, E. 2002 Lattice Boltzmann simulations of binary fluid flow through porous media. *Phil. Trans. R. Soc. Lond. A* **360**, 535. (doi:10.1098/rsta.2001.0944)
- Zhou, H. & Pozrikidis, C. 1994 Pressure-driven flow of suspensions of liquid drops. *Phys. Fluids* **6**, 80. (doi:10.1063/1.868048)