

A Study of Aluminium Zinc Indium Thermal Spray Coatings for the Protection of Steel Rebars in Reinforced Concrete

LEWIS, Oliver, O'FLAHERTY, Fin <<http://orcid.org/0000-0003-3121-0492>>, LAMBERT, Paul, STEPHENSON, Dan, BODEN, M and THISTLETHWAITE, S

Available from Sheffield Hallam University Research Archive (SHURA) at:

<http://shura.shu.ac.uk/5666/>

This document is the author deposited version. You are advised to consult the publisher's version if you wish to cite from it.

Published version

LEWIS, Oliver, O'FLAHERTY, Fin, LAMBERT, Paul, STEPHENSON, Dan, BODEN, M and THISTLETHWAITE, S (2011). A Study of Aluminium Zinc Indium Thermal Spray Coatings for the Protection of Steel Rebars in Reinforced Concrete. In: 5th RIPT (Les Recontres Internationales sur la Projection Thermique), Limoges, France, 7-9 December 2011.

Copyright and re-use policy

See <http://shura.shu.ac.uk/information.html>

A Study of Aluminium Zinc Indium Thermal Spray Coatings for the Protection of Steel Rebars in Reinforced Concrete

O. Lewis¹, F. O'Flaherty¹, P. Lambert¹, D. Stephenson², M. Boden² and S. Thistlethwaite²

1. Materials and Engineering Research Institute, Sheffield Hallam University, Howard Street, Sheffield. S1 1WB

2. London and Scandinavian Metallurgical Ltd, Fullerton Road, Rotherham. S60 1DL

Background

- Steel reinforcement, or 'rebars' are extensively used in concrete structures but are susceptible to corrosion attack, leading to cracking and spalling of the concrete.
- Mitigation measures include modifying the internal environment in the concrete (e.g. chloride extraction), adopting cathodic protection, creating a barrier between the reinforcement and the concrete (i.e. coating the reinforcement) or using more corrosion resistant materials for the rebars¹.
- A metallic, thermally sprayed coating, on the concrete surface can form a protective barrier, whilst also cathodically protecting the rebars, provided an electrical connection is made to the coating.
- The benefits of this method include the ability to deposit a diverse range of thick (up to around 500 µm) coatings which can also be repaired in-situ² (figure 1).

Project Objectives

- Determine the ability of thermally sprayed Al-Zn-In coatings to sacrificially protect steel rebars in a chloride environment.
- Investigate the effect of surface finish on the bond strength of the coatings after exposure.



Figure 1 Photograph Showing Application of a Thermal Spray Coating to a Concrete Structure

(Photo courtesy Metallisation Ltd)

Experimental Procedure

Concrete Blocks

Concrete blocks measuring 170 x 170 x 55 mm were cast³ with one of three surface finishes:

- Steel mould finish
- U4 float finish in accordance with MCHW⁴
- Grit blasted finish to BS EN 1766⁵

Coatings

Commercially available aluminium zinc indium coatings (composition given in table 1) were applied by arc spraying.

Coatings with a nominal thickness of 200 and 350 µm were applied for comparison.

	Zinc	Indium	Aluminium
Composition (wt%)	4.5-5.5	0.02-0.05	Remainder

Table 1 Nominal Composition of Al-Zn-In Coating

Testing

The ability of the coatings to sacrificially protect steel rebars was studied by measuring the corrosion current using a zero resistance ammeter (ZRA). The experimental arrangement is shown in figure 2. A 1:1 anode-cathode ratio was used.

After 2 weeks exposure to 5% w/v sodium chloride solution, the adhesion of the coatings was determined by pull-off tests using 50 mm diameter dollies attached to the surface (figure 3). A minimum of two tests was performed on each sample.

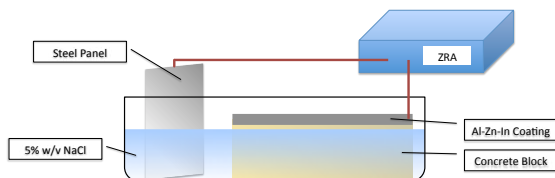


Figure 2 Schematic Showing Experimental Arrangement Used for Zero Resistance Ammetry Testing



Figure 3 Photographs Showing Pull-off Bond Tests

Results

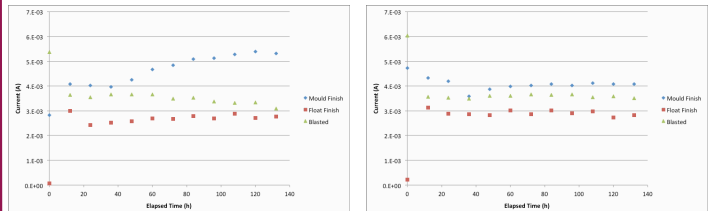


Figure 3 Corrosion Current Data for (a) 200 micron and (b) 350 micron Al-Zn-In Coatings in 5% w/v NaCl




Figure 4 Al-Zn-In Coating Average Bond Strength Data After 2 Weeks Exposure in 5% w/v NaCl

Conclusions

- Thermally sprayed Al-Zn-In coatings are able to cathodically protect steel rebars.
- Post-exposure coating thickness is better on grit blasted surfaces.
- Increasing coating thickness has a negative effect on bond strength.

Further Work

- Further ZRA tests and pull-off bond tests of different coatings thicknesses and surface finishes.
- Depolarization tests in chloride solution.
- Comparative trials with pure aluminium coatings.