

## **Lighting for cycling in the UK : a review**

FOTIOS, S and CASTLETON, Holly <<http://orcid.org/0000-0001-6633-8205>>

Available from Sheffield Hallam University Research Archive (SHURA) at:

<http://shura.shu.ac.uk/12565/>

---

This document is the author deposited version. You are advised to consult the publisher's version if you wish to cite from it.

### **Published version**

FOTIOS, S and CASTLETON, Holly (2017). Lighting for cycling in the UK : a review. *Lighting Research and Technology*, 49 (3), 381-395.

---

### **Copyright and re-use policy**

See <http://shura.shu.ac.uk/information.html>



The Society of  
Light and Lighting

# Lighting for cycling in the UK—A review

S Fotios PhD and HF Castleton PhD

Sheffield School of Architecture, The University of Sheffield, Sheffield, UK

Received 9 July 2015; Revised 4 September 2015; Accepted 9 September 2015

While UK governments have recently sought to increase cycling activity, it remains a minority interest. One reason for this is the perceived danger of cycling on roads filled with traffic. There is statistical evidence to support this perception; for equal exposure, cyclists are more likely to be seriously injured than either drivers or pedestrians. Lighting has a role to play in reducing the hazards of cycling by enhancing the visibility and conspicuity of cyclists. Unfortunately, it is not at all clear that the current lighting regulations and recommendations for cycling and cyclists are the best that can be achieved or are even adequate for these purposes. A number of actions are suggested that should enable lighting's contribution to the safety of cyclists to be realized.


## 1. Cycling in the UK

If you believe the publicity, over the last decade cycling has become much more popular in the UK. However, statistics from the 2013 road traffic survey<sup>1</sup> suggest that this is an overstatement. Cycling is still very much a minority activity. The percentage of people in the 2013 survey who cycled less than once a year is 65%. At the other extreme, the percentage who cycle three or more times a week is 8%. This percentage of regular cycle users has been stable since 2003. Where there has been a slight change since 2003 is in the percentage who cycle occasionally; the number who cycle once or twice a week has increased from 6% to 8% and those who cycle less than once a week but more than once or twice a month has increased from 3% to 5%. Where a more dramatic change has occurred is in the number of miles covered by those who do cycle. From 2003 to 2012, this has increased from 39 to 55 miles per person per year.<sup>2</sup>

Clearly, there has been an increase in activity among cycling enthusiasts, so it is worth considering why this has occurred. One reason is that cycling has been actively promoted by UK governments as an alternative to driving as a means of improving public health through increased physical activity as well as having consequential benefits in terms of reduced road congestion, lower emissions from vehicles and less fuel use. In 2005, the cycling towns programme was launched with the aim of increasing the number of everyday cycling trips.<sup>3</sup> The scheme saw an increase in cycling over three years of 27%, averaged across the demonstration towns, showing that specific and targeted measures can increase cycling. In 2014, the UK Government announced an additional £214 million investment in cycling, £114 m being allocated for eight cycling cities and £100 m for improvement of the strategic road network, this within an overall investment in cycling by the UK government of £700 million.<sup>4</sup> This investment, the associated development of cycle tracks and lanes and the surrounding publicity has brought some return. In London, the number of people who cycle to work has doubled between 2001 and 2011. In Brighton, the number cycling to work has increased by

---

Address for correspondence: Steve Fotios, School of Architecture, The University of Sheffield, The Arts Tower, Western Bank, Sheffield S10 2TN, UK.  
E-mail: [steve.fotios@sheffield.ac.uk](mailto:steve.fotios@sheffield.ac.uk)

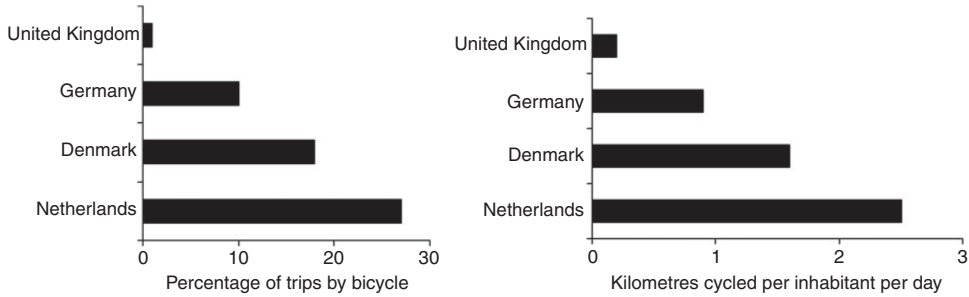

**Figure 1** Cycling behaviour in four European countries. (left) Percentage of trips made by bicycle; (right) kilometres cycled per day per inhabitant.<sup>5</sup>

**Table 1** Number of cyclists killed, seriously injured and slightly injured in the UK from 2005 to 2013.<sup>7</sup>

Status	2005–2009 average	2009	2010	2011	2012	2013
Killed	130	104	111	107	118	109
Seriously injured	2398	2606	1660	3085	3222	3143
Slightly injured	13,934	14,354	14,414	16,023	15,751	16,186
Total	16,483	17,064	17,185	19,215	19,091	19,436

109% over the same period. In Bristol, the increase was 94%, in Manchester it was 83%, in Newcastle 81% and in Sheffield 80%. Unfortunately, such increases have not occurred everywhere. In 202 out of 348 local authorities in England and Wales, the number of working residents cycling to work declined between 2001 and 2011.

The frequency of cycling in the UK lags a long way behind other European countries such as the Netherlands, Germany and Denmark.<sup>5</sup> Figure 1 shows the percentage of trips made by bicycle in four European countries and the number of kilometres cycled per day per inhabitant in the same countries.

Given that all these countries are at a similar stage of economic development, why is it that there are such large differences in the use of bicycles as an everyday means of transport? One answer to that question is the perceived safety of using a bicycle. The 2012 British Social Attitudes Survey found that 48% of existing cyclists and 65% of non-cyclists think it is too dangerous to cycle on

UK roads.<sup>6</sup> Further, there has been a steady drip of news stories focused on the death of cyclists, crushed by heavy good vehicles (HGVs). The perception that taking to a bicycle in the UK is to take your life in your hands has some statistical support. Table 1 gives the numbers of cyclists killed, seriously injured and slightly injured on roads in the UK from 2005 to 2013.<sup>7</sup> It can be seen that while the number of cyclists killed has, if anything, decreased slightly, the number of cyclists seriously and slightly injured has clearly increased.

While the absolute numbers of cyclists injured has clearly increased, this may not mean that the roads are becoming more risky for cyclists. It is more likely to be due to an increase in exposure, i.e. there are more cyclists on the road. When attempts are made to relate the number of cyclists killed or seriously injured for the same level of exposure, i.e. number killed or seriously injured per billion miles cycled, the picture gets rather confused. The number of cyclists


**Table 2** Casualty rate per billion vehicle miles in the United Kingdom in 2013.<sup>7</sup>

Mode	Killed	Killed or seriously injured
Car driver	2	24
Pedestrian	34	463
Cyclist	34	1036
Motorcyclist	119	1853

killed per billion miles cycled shows a decline since 2005, but the number seriously injured shows an increase since 2005, the amount varying with the source of the distance cycled data.<sup>7</sup> Where there is no doubt is the risk of death or serious injury to cyclists relative to other means of personal transport. Table 2 shows the casualty rate per billion vehicle miles in the UK in 2013.<sup>7</sup> It is clear that cyclists in the UK are at much greater risk of being killed or seriously injured than car drivers and pedestrians.

International comparisons also support the view that the perception of how safe cycling is impacts the use of cycling as a regular means of transport. Figure 2 shows the number of fatalities and injuries per 100 million kilometres cycled for the UK compared with the Netherlands, Germany and Denmark for 2007. Of the four countries considered, you are more at risk of being killed or injured on a bicycle on UK roads than in the other three countries where bicycle use is more common.


There are a number of plausible reasons for this.<sup>5</sup> First and foremost is the fact that in German, Dutch and Danish cities, there has been deliberate policy over several decades to provide separate cycling facilities in the form of cycle paths and dedicated cycle lanes, particularly where traffic density is high and at junctions. This has been supported by extensive traffic calming measures in residential areas, by careful integration with public transport and by making driving in the centre of cities slow, expensive and inconvenient. These measures can all be assumed to have a

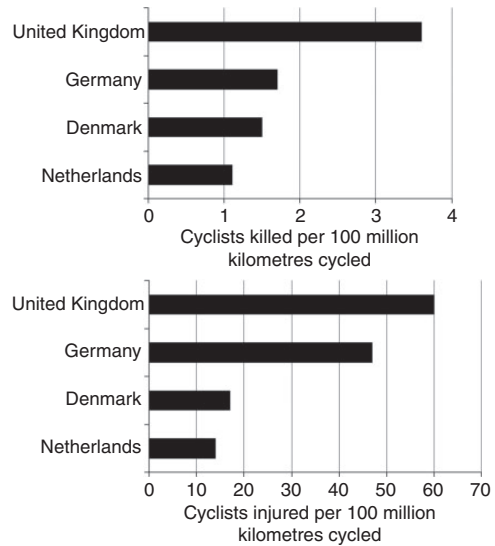**Figure 2** Fatalities (top) and injuries (bottom) per 100 million kilometres cycled in four European countries.<sup>5</sup>


beneficial effect on cyclist's safety by reducing the competition for road space between cyclists and drivers and, where competition does occur, by reducing impact speeds. But one aspect of cyclist's safety that has not been considered is lighting, both lighting to see by and lighting to be seen by. This review is concerned with the role of both forms of lighting in the safety of cyclists by day and night.

## 2. Lighting and cyclist fatalities and injuries

The involvement of lighting in cyclist casualties can be considered along several different dimensions. One is whether the accidents happen by day or night. Figure 3 shows data from Greater London in 2008 by the hour and Figure 4 shows similar data by the month.<sup>8</sup> From Figure 3, it is clear that the majority of casualties occur during daylight, but there is still a significant minority that occur after dark. From Figure 4, it is clear

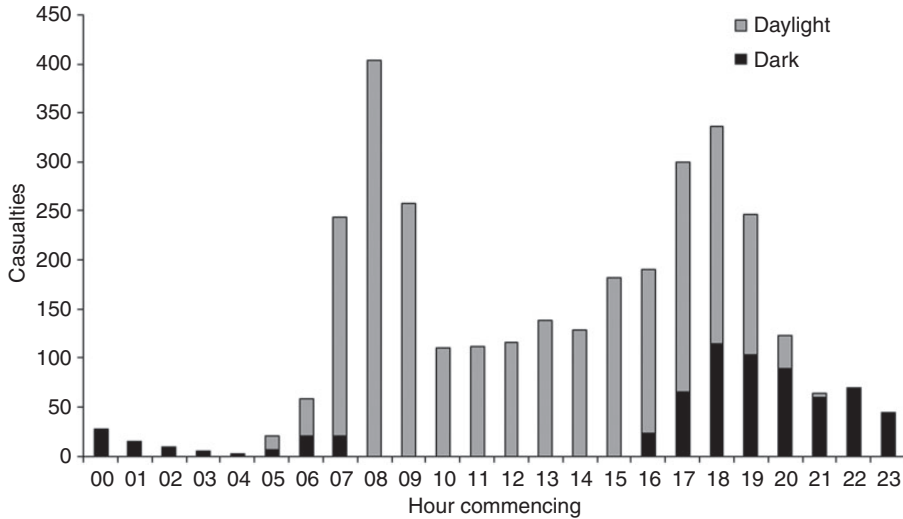

**Figure 3** Cyclist casualties by time of day and light condition in Greater London, 2008.<sup>8</sup>

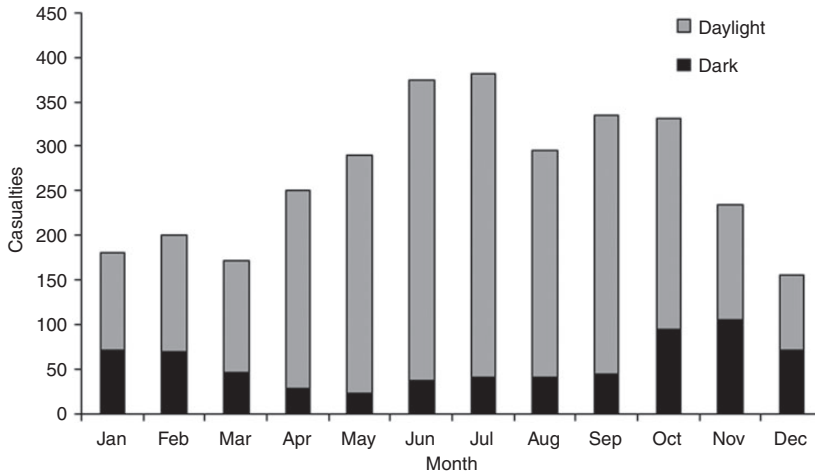

**Figure 4** Cyclist casualties by month and light condition in Greater London, 2008.<sup>8</sup>

that as the number of hours of daylight reduce, the number of casualties occurring after dark increases. These patterns are related in that they are consistent with the times at which traffic densities are likely to be at a maximum, during the morning and evening rush hours, and for the months in

which these rush hours occur in darkness. Interestingly, a similar pattern is also evident in a study of the number of pedestrian fatalities and serious injuries occurring in the four weeks before and after the change from daylight saving time when the clocks go back.<sup>9</sup> On average for the years 2000–2007,

**Table 3** Percentage of different vehicle types in the UK and their involvement in deaths serious injuries and all injuries of cyclists.<sup>7</sup>

	HGV	LGV	Bus/coach	Car	Motorcycle
Percentage of traffic	5	13	1	78	1
Percentage of cycle deaths	23	8	5	58	2
Percentage of cycle serious injuries	3	7	2	84	2
Percentage of cycle casualties	2	7	2	87	1

Note: HGV: heavy goods vehicle; LGV: light goods vehicle.

there were 10% more collisions killing or injuring a pedestrian in the four weeks following the clocks going back than in the four weeks before the clocks changed.

Of course, these data are from Greater London where road lighting is ubiquitous. Another dimension on which the role of lighting can be considered is between urban and rural roads. Urban roads will usually be lit; rural roads will not. The majority of cyclist casualties occur on urban roads (60%). This should not be surprising, given that 68% of bicycle traffic is on urban roads.<sup>10</sup> However, rural roads have a higher accident rate than urban roads for equal exposure (7.3 vs. 2.6 fatalities per billion vehicle miles), although it is suggested that under-reporting of less serious accidents in urban areas may also contribute to this difference.<sup>7</sup> Further, higher driving speeds on rural roads are likely to result in more serious injuries to cyclists. Interestingly, the most common cause of death or serious injury to cyclists on rural roads at night is being rear ended by a motor vehicle.<sup>11</sup> In this situation, the driver will be relying on his vehicle headlights to make whatever is ahead visible. Unfortunately, studies have shown that driving at more than about 30 mph on low beam headlamps on an unlit road is largely an act of faith based on the belief that there is nothing occupying the road ahead.<sup>12</sup> This all suggests that lighting has a role to play in improving the safety of cyclists on rural roads. That role is unlikely to involve extending road lighting to rural areas for both financial and

environmental reasons. It is much more likely to involve better lighting for both bicycles and motor vehicles and the application of passive infrared technology to motor vehicles.

The accident situation for cyclists in urban areas is rather different.<sup>7</sup> For almost two thirds of cyclists killed or seriously injured, the accident occurred at or near a junction. Thirty percent of cyclists killed or seriously injured at crossroads and t-staggered junctions occurred when the cyclist was 'going ahead' and the other vehicle involved was turning right or turning left. This is a particular problem with HGVs, these being involved in 23% of cyclist fatalities but representing only 5% of traffic in Great Britain (Table 3). This problem with HGVs is unlikely to be solved by lighting because in the most common scenarios described above, the cyclist is hidden from the driver in the vehicle's blind spot. Perhaps the detectors that warn drivers of another vehicle in the blind spot that are now available on some cars should be applied to HGVs as well.

But that is not the whole story. While collisions between cyclists and HGVs get a lot of publicity because they are often fatal, the fact remains that cars are much more frequently involved in cyclists' deaths and serious injuries than any other vehicle type (Table 3). Further, a significant proportion of fatal and serious accidents occur as a result of both the cyclist and the other vehicle 'going ahead'. This suggests another problem that is unlikely to be solved by lighting, failing to

give the cyclist sufficient room. Knowles *et al.*<sup>11</sup> found that motorists passing too close was a factor in 19% of fatal collisions with cyclists. Walker *et al.*<sup>13</sup> sought to capture the range of overtaking proximities that might realistically be seen on a bicycle commute during peak traffic hours in outer London. They found that the mean passing proximity was 1.18 m (standard deviation = 0.3 m, range = 0.02–2.74 m) with 1–2% of overtakes coming within 0.5 m of the cyclist. Whether this was due to a failure to see the cyclists or pressure on space from other traffic is not known. Whatever the cause, close passing can be hazardous for cyclists because their balance can be affected by side winds.

Another common contributory factor involved in fatal or serious injury collisions is the cyclist entering the road from the pavement. Knowles *et al.*<sup>11</sup> found this to be a factor in 20% of serious collisions.

While there are undoubtedly aspects of cyclist/driver collisions that do not involve lighting, when the major reported contributory factor to such collisions is considered a possible role for lighting is evident. This is ‘failed to look properly’. The driver is reported to have ‘failed to look properly’ in 57% of serious collisions as has the cyclist in 46%.<sup>11</sup> Whether this means the driver or cyclist failed to look at all or looked but failed to see is not clear.

Given that people looked but failed to see, why is that so? At night, this may be a simple matter of visibility. On an unlit road, a cyclist without bicycle lights and wearing dark clothing will be almost invisible until illuminated by vehicle headlights by which time it may be too late for the driver to avoid a collision, but during the day all cyclists will be visible to drivers. In daytime, the problem is not one of visibility but rather conspicuity. Conspicuity is the degree to which an object is capable of attracting the attention of an observer by its physical properties against a given background.<sup>14</sup> There are two elements

to conspicuity; visual conspicuity which is a bottom-up process in human perception and cognitive conspicuity which is a top-down processes linked to the fact that an observer’s focus of attention is strongly influenced by expectations, objectives and knowledge. This is evident in the work of Summala *et al.*<sup>15</sup> who investigated the visual scanning behaviour of drivers approaching a junction in Finland. They found that vehicle drivers tended to look mostly towards on-coming vehicles, or the location where on-coming vehicles were expected to be found. This was interpreted as a visual scanning strategy developed by drivers, which favours detecting conflicting motor vehicles but ignores cyclists; a tendency to concentrate on detection of more frequent and major dangers, ignoring visual information on less frequent dangers. While, with experience, drivers can be expected to learn what is important in the traffic environment and where it is located, for cyclists the immediate priority should be increase visual conspicuity by making the bicycle stand out from other vehicles on the road.

Finally, it is worth mentioning that according to hospital statistics, 16% of cyclists killed or seriously injured have not been in collision with another vehicle at all.<sup>11</sup> The most common alleged cause of these is loss of control (67% for fatalities and 44% for serious injuries) although to what extent this involves rider error, cycle failure or road surface faults such as potholes or road debris, is not known. To the extent that road surface faults or debris are involved, an improvement in bicycle lighting to make the road ahead more visible over a greater distance would be useful.

### 3. Lighting for cycling

From the above, it is evident the lighting equipment required on bicycles should have a role in making the road ahead visible to the cyclist and in making the cyclist visually

conspicuous to other road users by day and night.

### 3.1 Bicycle lighting

The Road Vehicles Lighting Regulations Act 1989 (amended 2009) outlines the lighting equipment for bicycles to be ridden legally at night.<sup>16</sup> During the hours of darkness clean, working and visible lights and reflectors are required on pedal cycles when in use. Hours of darkness are defined as from half an hour after sunset to half an hour before sunrise. Lamps and reflectors are not required when a bicycle is used in daytime. The lamps and reflectors required for the use of a bicycle during the hours of darkness are:<sup>17</sup>

- White front lamp
- Red rear lamp
- Red rear reflector
- Amber pedal reflectors, front and rear.

Front lamps must be white in colour, mounted up to 1500 mm above ground level and should conform to BS 6102/3.<sup>18</sup> Rear lamps must be red and also conform to BS 6102/3. Rear reflectors must be red, mounted between 250 and 900 mm above ground level and conform to BS 6102/2.<sup>19</sup> Pedal reflectors must be amber and also conform to BS 6102/2.

In 2005, the Road Vehicles Lighting Regulations were amended so as to allow the use of flashing lights on bicycles at night, both front and rear, provided white light was used to the front and red light to the rear and the flash rate was between 1 and 4 Hz. More recently, the Pedal Bicycles (Safety) Regulations 2010 have been introduced. These ensure that new pedal cycles are sold with additional reflectors, above what is required by the Road Vehicles Lighting Regulations: White or yellow reflectors on both sides of each wheel or tyre and a white wide-angle front reflector.<sup>20</sup>

Although British Standards have been referred to above, they are little used by

bicycle lighting equipment manufacturers. An European Union (EU) directive means that products tested to the requirements of other EU countries can also be used in the UK, provided they give an equivalent level of safety. Germany is one of the biggest markets for bicycle sales and as a result the German K-mark requirements are widely used by manufacturers of bicycle lighting equipment. In these, the front lamp must meet specific illuminance distribution criteria. Figure 5 shows the required illuminance pattern. The HV point in Figure 5 is the intersection of a line straight ahead from the lamp with a vertical plane 10 m from the lamp. The illuminance at this point should be larger than 20 lux. Zone 1 is a dark region, where the illuminance must be less than 2 lux. The minimum illuminances at other locations are given in Figure 5. This distribution is designed to provide adequate visibility ahead of the bicycle while limiting glare for others on the roadway. It has been used as a target for the design of a bicycle head lamp,<sup>21</sup> but the effectiveness of doing so, in terms of improved cyclist vision or safety, has yet to be evaluated.

### 3.2 Lighting of roads

The majority of urban roads that cyclists use will have been lit so as to provide adequate lighting for drivers. The road lighting recommendations used in the UK<sup>22,23</sup> identify three distinct situations; traffic routes where vehicles are dominant, conflict areas where streams of vehicles intersect with each other or with pedestrians and cyclists and residential roads where the lighting is primarily intended for pedestrians and cyclists. Traffic routes are divided into different classes depending on the road type, average daily traffic flow, speed limits, the frequency of conflict areas, any parking restrictions and the presence of pedestrians. For traffic routes, the photometric conditions required are specified as minimum maintained average





1992 issue of BS5489,<sup>25</sup> these being three classes with average illuminances of 3.5 lux, 6.0 lux and 10 lux. Of these it is suggested that while 3.5 lux is suitable for cycle tracks, increasing this to 6.0 lux would enhance the feeling of security and encourage greater use by cyclists: the higher level should be used selectively (i.e. not assumed to be a common recommendation).

Sustrans,<sup>26</sup> a UK organisation promoting cycling infrastructure, suggests that recommended levels are up to 5 lux maintained average and 1 lux minimum maintained, and that lower levels of lighting can be provided in normal risk areas. IESNA DG-5<sup>27</sup> recommends an average horizontal illuminance of 5 lux for walkways and cycle paths, with a uniformity (average to minimum) of 0.1.

The Department for Transport's Local Transport Note 2/08: Cycle Infrastructure Design;<sup>28</sup> Section 7 Cycle Lanes does not consider lighting but Section 8 Off-road Cycle Routes has a short section on lighting design pointing out that:

- Cyclists using two-way cycle tracks alongside unlit carriageways may be blinded or dazzled by the lights of oncoming vehicles (including rural roads) and drivers may be confused when seeing cycle lights approaching on their nearside.
- Locating the track as far away as possible from the carriageway edge, or by providing with-flow cycle tracks alongside both sides of the carriageway can mitigate these issues.
- Cycle routes across large quiet parks or along canal towpaths may not be well used outside peak commuting times after dark, even if lighting is provided, with an on-road alternative lit route suggested as mitigation.
- It is not expected that routes outside built up areas used primarily for recreation would normally need to be lit except where there were road safety concerns, such as at crossings or where the track is directly alongside the carriageway.

For technical information, readers are again referred to ILE TR23<sup>24</sup> as they are in subsequent publications.<sup>29</sup> Unfortunately, this document has recently been described as largely out of date<sup>26</sup> in part because it refers to the 1992 issue of BS5489 which has been superseded by the 2003 and 2013 issues.

#### 4. Effectiveness of lighting for cycling

While there are legal requirements for the use of lighting on bicycles and technical standards applicable to the relevant lighting equipment, it is difficult to determine if the latter are adequate. This is because the legal requirements are rarely enforced and, as a result, a significant number of cyclists ride with no lighting or with partial lighting. Observations made in Oxford on a central street without any cycle lane, at dusk, in the rush hour, showed that of the 392 cyclists observed only 163 (42%) had both front and rear lamps lit. A slightly higher percentage had either front or rear lamps lit (49% front lamp alone, 50% rear lamp alone), but this means 50% of cyclists were riding in traffic, at dusk, without any lighting at all.<sup>30</sup> More recently, O'Boyle<sup>31</sup> has reported two separate road observation studies carried out in London, in fine weather, in the same week in March. One survey was done on a minor road, at dusk, at the weekend. The other was carried out on a major road, at dusk, on a working day, in the evening rush hour. The percentage of cyclists riding with both front and rear lamps lit was 25% on the minor road and 58% on the major road.

Similar results have been found in other countries. Observations in Lund, Sweden, found that only 28% of 896 cyclists used front and rear lights and 39% had no lights.<sup>32</sup> Follow-up interviews with 100 cyclists seeking explanations for the low frequency of light use revealed that 82% thought the function of a bicycle lamp was to be seen in the dark, and

since Lund has good road lighting, only a rear light is needed.

The problem this underuse of the required bicycle lighting poses for understanding the effectiveness of such lighting is to what extent the absence of lighting on a bicycle increases the risk of death or serious injury. Hoque<sup>33</sup> provides some reassurance that lighting does matter. He examined fatal cycling accidents in the state of Victoria in Australia with an emphasis on night-time accidents. Data were analysed from the period 1981 to 1984 during which 1440 of the 29 400 accidents involved cyclists. At night-time, cyclists being killed in accidents involving motorists coming from behind were the predominant problem, with about 80% of all night-time fatalities attributed to this direction of approach, compared with 30% in daytime. Hoque found that approximately 61% of cyclists involved in fatal accidents at night did not have any lights on their bicycle.<sup>33</sup> As for road lighting, Hoque also found that unlit streets had a greater proportion of night-time fatal accidents involving cyclists.

These findings are what one would hope for given the predicted importance of visibility and visual conspicuity. They also indicate that having some bicycle lights or some road lighting is better for reducing cyclist fatalities than having no bicycle lights or no road lighting, but they do not tell us what the best form of bicycle lighting or road lighting might be. However, these data are more than 30 years old and cyclist behaviour can change a lot over such a period as is shown by the growth in the use of helmets by cyclists. Ideally, a review of the latest accident statistics for cyclists should be carried out, but that would only be worthwhile if the relevant databases have sufficient detail on lighting conditions recorded, which may not be the case. This may be why, despite detailed analyses of the effects of road lighting on vehicle accidents,<sup>34,35</sup> few studies have assessed the effects of road lighting and bicycle lights on safety.<sup>36</sup>

## 5. The future

The above review has shown that cyclists are at some risk on the roads, both day and night. There are several reasons for this, but there can be little doubt that lighting has a role to play in reducing this risk. Specifically, the objective of future actions relating to lighting for cycling should be to reduce the number of cyclist fatalities and serious injuries in the UK by using lighting to increase the visibility and conspicuity of cyclists, by both day and night.

These actions can take several different forms and require responses by several different bodies. They are:

1. Enforce the existing legal requirements for lighting of bicycles after dark much more rigorously. This could be done quickly and would have the effect of increasing the proportion of bicycles lit at night. Further, experience in trying to use persuasion rather than enforcement as a means of increasing the use of lights at night by cyclists has not been encouraging.<sup>37</sup>
2. Extend the legal requirements for the lighting of bicycles after dark to daytime. This will increase the conspicuity of cyclists during the day. Motorcyclists are already encouraged to use their headlights during the day. Wells *et al.*<sup>38</sup> have shown that motorcyclists who use headlamps by day have a 27% lower risk of being killed or injured than those that do not. Further, since 2011, all new cars in the European Union have to be equipped with daytime running lights. It is time the same principle was applied to bicycles.
3. Revise data collection requirements for accidents involving bicycles to include details of lighting conditions, both the lighting of the bicycle as well as ambient and road lighting. This is essential for the future analysis of the effectiveness of different forms of lighting. It will be many years before sufficient data are collected to make statistically reliable

analysis possible, but unless all the relevant data is collected, analysis is impossible.

4. Conduct research on the effectiveness of different types of bicycle lighting on visibility and conspicuity. There are many forms such research could take.

One form is a field trial of a new technology. For example, Madsen *et al.*<sup>39</sup> examined the benefits of permanent running bicycle lights in a study in Denmark. These lights were permanently fixed to bicycles, thus avoiding the possibility of forgetting to use lights, and were powered by magnets fitted to bicycle spokes to avoid battery problems. Accident rates (self-reported via the internet) were monitored over a 12-month period, these being accidents involving personal injury to the cyclist. The experimental group comprised 1592 cyclists for whom the lights were fitted for free in advance of the survey period. The control group comprised 1714 cyclists for whom the lights were fitted after the monitoring period. The safety effect of the lights was analysed by comparing incident rates. The accident rate was significantly lower among the experimental group using permanent running bicycle lights, a reduction of 41% for accidents involving personal injury. The difference was significant for accidents in daylight, but was not suggested to be a significant reduction for accidents at night-time. The authors suggest that this is because cyclists did not tend to use their conventional bicycle lights in daytime, and that both groups were equally good at remembering to use conventional lights at night-time.

Another form would be to study cyclists' visual behaviour in different lighting conditions by measuring what they look at using eye-tracking technology. This was recently done for pedestrians, using a dual task to identify fixations at critical moments<sup>40</sup> and to estimate the distance and duration for which pedestrians desire to carry out these fixations.<sup>41</sup> So far, eye-tracking studies used to record cyclists' visual behaviour have tended

to use artificial settings such as watching a video<sup>42</sup> and artificial, straight lanes marked out in a gymnasium.<sup>43</sup> For pedestrians, natural settings and videos lead to different gaze allocation<sup>44</sup> and the same is expected for cyclists. One study<sup>45</sup> has used eye tracking to investigate gaze in a natural setting, but did not employ a dual task or similar to reveal critical fixations from all gaze fixations.

Yet another form would be a laboratory study. For example, Fotios and Cheal<sup>46</sup> have examined the ability of pedestrians to detect a raised pavement block off-axis under different amounts of light of different spectra. A similar approach could be used to study the ability of cyclists to detect road surface defects while using different forms of bicycle front lighting.<sup>47</sup>

Internet-based research is another possibility. Gershon and Shinar<sup>48</sup> investigated the use of a novel helmet-mounted blinking light system for motorcyclists. The aim was to provide a unique visual signal to enhance attention and search conspicuity, defined as the ability to detect a motorcyclist when an observer's attention is not specifically drawn to it and the ability to detect a motorcyclist while actively searching for one, respectively. Video clips were used in daytime and dusk scenarios on three types of road and at two distances (60 m and 140 m) with riders wearing a black suit, a white suit, a reflective vest, and reflective vest with the novel lighting system. The blinking light system was found to have no effect in daylight, but at dusk the additional lighting increased conspicuity to observers regardless of whether or not they had been alerted to the presence of motorcyclists.

There are also simpler forms of experiment suitable for those who want to have greater control of their experiment than is possible on the internet. For example, Rößger *et al.*<sup>14</sup> reported that for motorcycles the predominant cause of accidents was the inability of the other vehicle driver to adequately see the

motorcyclist. Linear light sources were placed along the forks (vertical) and between the rear-view mirrors (horizontal) of the motorcycle to present a T configuration, a distinctive arrangement even at distance and similar to an abstract picture of a motorcycle seen from the front. Fifty-two test participants were shown 40 photographs of a road junction, of which nine included a motorcyclist, and within these nine were variations in lighting configuration, for example headlamp only or headlamp plus T lights. The task was to identify what vehicles to pay attention to when planning to pull out into or cross the road. The T configuration led to faster identification.

5. Explore the potential of different forms of bicycle lighting to enhance conspicuity by day and night. There are many different approaches possible using different combinations of the amount, spectrum and distribution of light together with temporal and spatial changes. One example is evident in the work of Wood *et al.*<sup>49</sup> who found that, in the dark, drivers responded to the cyclists wearing knee and ankle retroreflectors at significantly longer distances than cyclists who wore a fluorescent vest alone or black clothing only. Attaching retroreflectors to knees and ankles would produce a moving light spot. It would also be useful to compare the effectiveness of lighting on cyclist's conspicuity with the effectiveness of alternative methods such as retroreflectors and high-visibility clothing.
6. Review the current UK recommendations for the lighting of cycle tracks and cycle lanes on roads. Comparisons should be made with the equivalent recommendations used in countries with long experience of building cycle tracks and marking cycle lanes such as the Netherlands.
7. Conduct an economic appraisal of the costs and benefits of different approaches to reducing cyclist fatalities and serious injuries. It is clear that the most effective

way to minimize cyclist fatalities and serious injuries would be to construct an extensive network of cycle tracks separate from the roads used by vehicles, but this would also be the most expensive and take the most time. The relative costs, benefits and time scale of using lighting instead are worthy of study.

## 6. Conclusions

Over the last decade, UK governments have sought to increase cycling activity, but it remains a minority interest. One reason for this is the perceived danger of cycling on roads filled with traffic. There are a number of ways to reduce this danger, some expensive and long term, others inexpensive and short term. Constructing cycle tracks that separate cyclists from other traffic is an expensive and long-term option. Improving the lighting of bicycles and of cycle tracks and cycle lanes is an inexpensive and short term option. The lighting of bicycles and of cycle tracks and cycle lanes needs to be developed so as to enhance the visibility and conspicuity of cyclists, by both day and night. This development is necessary because it is not at all clear that the current lighting regulations and recommendations are the best that can be achieved or are even adequate. Research into the visibility provided by bicycle lighting and the conspicuity of cyclists using different forms of bicycle lighting, by day and night, on lit and unlit roads, is needed if lighting's contribution to the safety of cyclists is to be realized.

## Acknowledgement

We would like to acknowledge a significant contribution to the drafting of this article from Peter Boyce.

## Declaration of Conflicting Interests

The author(s) declared no potential conflicts of interest with respect to the research, authorship, and/or publication of this article.

## Funding

The author(s) received no financial support for the research, authorship, and/or publication of this article.

## References

- 1 Department for Transport. *National Travel Survey*, Table NTS 0313 Frequency of use of different transport modes: England 2003 to 2013. London: Department for Transport, 2014.
- 2 Department for Transport. *National Travel Survey*, Table NTS 0305 Average distance travelled by mode: England 1995/1997 to 2013. London: Department for Transport, 2014.
- 3 Cycling England. *Cycling City and Town Programme Overview*. London: Department for Transport, 2010.
- 4 Department for Transport. *Briefing on the Government's Ambition for Cycling*. London: Department for Transport, 2013.
- 5 Pucher J, Buehler R. Making cycling irresistible: lessons from the Netherlands, Denmark and Germany. *Transport Reviews* 2008; 28: 495–528.
- 6 Department for Transport. *British Social Attitudes Survey 2012: Attitudes to Transport*. London: Department for Transport, 2013.
- 7 Department for Transport. *Reported Road Casualties Great Britain: 2013 Annual Report – Focus on Pedal Cyclists*. London: Department for Transport, 2014.
- 8 Transport for London. *Cycle Safety Action Plan*. London: TfL, 2010.
- 9 Department for Transport. *Improving Road Safety for Pedestrians and Cyclists in Great Britain*. London: The Stationary Office, 2009.
- 10 Department for Transport. *Pedal Cycle Traffic*, Table TRA0402 Pedal cycle traffic (vehicle miles) by road class in Great Britain, annually since 2006. London: Department for Transport, 2014.
- 11 Knowles J, Adams S, Cuerden R, Savill T, Reid S, Tight M. *TRL Report PPR 445 Findings. Collisions Involving Cyclists on Britain's Roads: Establishing the Causes*. Wokingham, UK: Transport Research Laboratory, 2009.
- 12 Boyce PR. *Lighting for Driving: Roads, Vehicles, Signs and Signals*. Boca Raton, FL: CRC Press, 2009.
- 13 Walker I, Garrard I, Jowitt F. The influence of a bicycle commuter's appearance on drivers' overtaking proximities: an on-road test of bicyclist stereotypes, high-visibility clothing and safety aids in the United Kingdom. *Accident Analysis and Prevention* 2014; 64: 69–77.
- 14 Rößger L, Hagen K, Krzywinski J, Schlag B. Recognisability of different configurations of front lights on motorcycles. *Accident Analysis and Prevention* 2012; 44: 82–87.
- 15 Summala H, Pasanen E, Räsänen M, Sievänen J. Bicycle accidents and drivers' visual search at left and right turns. *Accident Analysis and Prevention* 1996; 28: 147–153.
- 16 Department for Transport. *The Road Vehicles Lighting Regulations Act (amended 2009)*. London: Department for Transport, 2009.
- 17 British Standards Institution. *BS6102-1 Cycles. Specification for Safety Requirements for Bicycles*. London, BSI, 1992.
- 18 British Standards Institution. *BS6102-3 Cycles. Specification for Photometric and Physical Requirements of Lighting Equipment*. London: BSI, 1986.
- 19 British Standards Institution. *BS6102-2 Cycles. Specification for Photometric and Physical Requirements of Reflector Devices*. London, BSI, 1982.
- 20 Department for Transport. *The Pedal Bicycles (Safety) Regulations 2010*. London: Department for Transport, 2010.
- 21 Cai J-Y, Lo Y-C, Feng S-T, Sun C-C. Design of a highly efficient LED-based bicycle head lamp with additional ground illumination. *Lighting Research and Technology* 2014; 46: 747–753.
- 22 British Standards Institution. *BS EN 13201-2 Road Lighting Part 2 – Performance Requirements*. London: BSI, 2003.

- 23 British Standards Institution. *BS 5489-1: 2013 Code of Practice for the Design of Road Lighting*. London: BSI, 2012.
- 24 Institution of Lighting Engineers. *Technical Report Number 23 – Lighting of Cycle Tracks*. Rugby, UK: ILE, 1998.
- 25 British Standards Institution. *BS5489, Road Lighting: Part 3, Code of Practice for Lighting for Subsidiary Roads and Associated Pedestrian Areas*. London: BSI, 1992.
- 26 Sustrans. *Lighting of Cycle Paths – Technical Information Note 29*. Bristol, UK: Sustrans, 2012.
- 27 Illuminating Engineering Society of North America. *IESNA DG-5. Recommended Lighting for Walkways and Class 1 Bikeways*. New York: IESNA, 1994.
- 28 Department for Transport. *Local Transport Note 2/08: Cycle Infrastructure Design*. London: Department for Transport, 2008.
- 29 Department for Transport. *Local Transport Note 1/12 – Shared Use Routes for Pedestrians and Cyclists*. London: Department for Transport, 2012.
- 30 McGuire L, Smith N. Cycling safety: injury prevention in Oxford cyclists. *Injury Prevention* 2000; 6: 285–287.
- 31 O’Boyle C. *Are London’s cyclists visible?* MSc Thesis. University College London, London, 2010.
- 32 Setiawan P. *The use of lights on the bicycles: cyclists’ perception of safety. A case study in Lund*. PhD Thesis. Lund University, Lund, Sweden, 2009.
- 33 Hoque MM. An analysis of fatal bicycle accidents in Victoria (Australia) with a special reference to nighttime accidents. *Accident Analysis and Prevention* 1990; 22: 1–11.
- 34 Beyer FR, Ker K. Street lighting for preventing road traffic injuries – review. *Cochrane Database of Systematic Reviews* 2009, Issue 1, Article CD 004726. DOI 10.1002/14651858 CD004728 pub 2.
- 35 Wanvik PO. Effects of road lighting: an analysis based on Dutch accident statistics 1987–2006. *Accident Analysis and Prevention* 2009; 41: 123–128.
- 36 Twisk DAM, Reurings M. An epidemiological study of the risk of cycling in the dark: the role of visual perception, conspicuity and alcohol use. *Accident Analysis and Prevention* 2013; 60: 134–140.
- 37 Ferguson B, Blampied NM. Unenlightened: an unsuccessful attempt to promote the use of cycle lights at night. *Accident Analysis and Prevention* 1991; 23: 561–571.
- 38 Wells S, Mullin B, Norton R, Langley J, Connor J, Lay-Yee R, Jackson R. Motorcycle rider conspicuity and crash related injury: a case-control study. *BMJ* 2004; 328: 857–862.
- 39 Madsen JCO, Andersen T, Lahrman HS. Safety effects of permanent running lights for bicycles: a controlled experiment. *Accident Analysis and Prevention* 2013; 50: 820–829.
- 40 Fotios S, Uttley J, Cheal C, Hara N. Using eye-tracking to identify pedestrians’ critical visual tasks. Part 1. Dual task approach. *Lighting Research and Technology* 2015; 47: 133–148.
- 41 Fotios S, Yang B, Uttley J. Observing other pedestrians: investigating the typical distance and duration. *Lighting Research and Technology* 2015; 47: 548–564.
- 42 Igari D, Shimizu M, Fukuda R. Eye movements of elderly people while riding bicycles. *Gerontechnology* 2008; 7: 128.
- 43 Vansteenkiste P, Cardon G, D’Hondt E, Philippaerts R, Lenoir M. The visual control of bicycle steering: the effects of speed and path width. *Accident Analysis and Prevention* 2013; 51: 222–227.
- 44 Foulsham T, Walker E, Kingstone A. The where, what and when of gaze allocation in the lab and the natural environment. *Vision Research* 2011; 51: 1920–1931.
- 45 Vansteenkiste P, Zeuwts L, Cardon G, Philippaerts R, Lenoir M. The implications of low quality bicycle paths on gaze behavior of cyclists: a field test. *Transportation Research Part F: Traffic Psychology and Behaviour* 2014; 23: 81–87.
- 46 Fotios S, Cheal C. Using obstacle detection to identify appropriate illuminances for lighting in residential roads. *Lighting Research and Technology* 2013; 45: 362–376.
- 47 Castleton H, Fotios S, Qasem H. *Lighting for cycling: detecting road surface hazards*. 28th Session of the CIE. Manchester, UK, 28 June–4 July 2015.

- 48 Gershon P, Shinar D. Increasing motorcycles attention and search conspicuity by using alternating-blinking lights system (ABLS). *Accident Analysis and Prevention* 2013; 50: 801–810.
- 49 Wood JM, Tyrrell RA, Marszalek R, Lacherez P, Carberry T, Chu BS. Using reflective clothing to enhance the conspicuity of bicyclists at night. *Accident Analysis and Prevention* 2012; 45: 726–730.