

Thermo-catalytic reforming (TCR) of waste solid grade laminate

DI GRUTTOLA, Francesca, JAHANGIRI, Hessam, SAJDAK, Marcin, MAJEWSKI, Artur, BORELLO, Domenico, HORNUNG, Andreas and OUADI, Miloud

Available from Sheffield Hallam University Research Archive (SHURA) at:

<https://shura.shu.ac.uk/32204/>

This document is the Published Version [VoR]

Citation:

DI GRUTTOLA, Francesca, JAHANGIRI, Hessam, SAJDAK, Marcin, MAJEWSKI, Artur, BORELLO, Domenico, HORNUNG, Andreas and OUADI, Miloud (2023). Thermo-catalytic reforming (TCR) of waste solid grade laminate. *Journal of Cleaner Production* (419): 138276. [Article]

Copyright and re-use policy

See <http://shura.shu.ac.uk/information.html>



Thermo-catalytic reforming (TCR) of waste solid grade laminate

Francesca Di Gruttola^{a,*}, Hessam Jahangiri^b, Marcin Sajdak^{c,d}, Artur Majewski^c,
Domenico Borello^e, Andreas Hornung^f, Miloud Ouadi^c

^a Department of Electrical and Astronautical Engineering, University of Rome La Sapienza, Rome, 00184, Italy

^b Department of Engineering and Mathematics, Sheffield Hallam University, Sheffield, S1 1WB, United Kingdom

^c School of Chemical Engineering, University of Birmingham, Edgbaston, Birmingham, B15 2TT, United Kingdom

^d Department of Air Protection, Faculty of Energy and Environmental Engineering, Silesian University of Technology in Gliwice, 44-100, Gliwice, Poland

^e Department of Mechanical and Aerospace Engineering, University of Rome La Sapienza, Rome, 00184, Italy

^f Fraunhofer UMSICHT Fraunhofer Institute for Environmental, Safety and Energy Technology, An der Maxhütte 1, Sulzbach-Rosenberg, 92237, Germany

ARTICLE INFO

Handling Editor: Mingzhou Jin

Keywords:

Thermo-catalytic reforming

Syngas

Char

Oil

Alternative fuels

Hydrogen

Waste valorisation

ABSTRACT

Thermo-catalytic reforming (TCR) is defined as intermediate pyrolysis at moderate temperatures and heating rates with subsequent reforming at elevated temperatures using biochar as a catalyst. TCR experiments were carried out to pyrolyze and subsequently reform Solid Grade Laminate (SGL) waste. SGL is a Kraft paper-derived product and as it is widely used in many applications, high volumes of waste laminate must be disposed of at end of life. To assess TCR for SGL waste treatment, the characterisation of the initial feedstock was accomplished, and it concluded that SGL is suitable to be processed via TCR. The main energy carrier products (char, oil and syngas) were generated by TCR in a 2 kg/h pilot-scale reactor under a pyrolysis temperature of 500 °C and reforming temperature of 650 °C, respectively. The mass balance analysis demonstrated that 50 wt% of the initial feedstock was comprehensively converted to syngas, 28 wt% to char and 22 wt% to a liquid fraction containing both water (17 wt%) and organics (5 wt%). The oil showed good properties as its HHV reached a value of 32.72 MJ/kg, with low oxygen and sulphur contents. However further processing is required for the fuels to be within suitable limits for use as drop-in fuels for vehicles. The syngas was found to be rich in hydrogen especially when pyrolysis temperature reaches its maximum. Lastly, char revealed a calorific value of 25.94 MJ/kg and was of a stable form of carbon, exhibiting potential as a feedstock for gasification or as a carbon capture and storage medium. TCR of SGL represents novelty as this feedstock has not been tested before in a pyrolysis/reforming system and it is a promising route in an optic of circularity. In waste valorisation, TCR oil has a great opportunity to be used as a fuel or blended with other conventional fuels, thus supporting the shift towards more sustainable mobility.

1. Introduction

Since the industrial revolution, the world has been consuming ever-increasing amounts of energy from fossil fuels, thus emitting large amounts of non-neutral CO₂ from their combustion. This is widely believed to be the principal cause of climate change (Prasad and Ingle, 2019). Several actions are currently employed to contrast it and to achieve the net zero target through the decarbonization of all energy sectors by 2050 (Net Zero by 2050, 2021).

Furthermore, we are witnessing increasing concerns over the price and security of the supply of petroleum and natural gas, since energy consumption has been increasing even faster with population growth and industrial development. Therefore, any attempt to decrease the

demand for fossil fuels is considered environmentally beneficial (Santos et al., 2020a).

In this regard, wastes (including second-generation biomass) represent abundant and cheap resources for the bioenergy sector and biofuels production. Compared to first-generation biomass, wastes do not compete with food production or any other industrial use (Resende, 2014a) and do not affect biodiversity and water use. Their availability is analysed in Cerruti et al. (2020) by considering all different end-use and competing applications. A further study also demonstrated their future and consistent availability in 2025 (Di Gruttola and Borello, 2021). In fact, second-generation biomass is characterised by residues, wastes and co-products and they have the potential to change and decarbonise many industrial sectors with the lowest economic and environmental impact.

* Corresponding author.

E-mail address: francesca.digruttola@uniroma1.it (F. Di Gruttola).

<https://doi.org/10.1016/j.jclepro.2023.138276>

Received 28 February 2023; Received in revised form 20 July 2023; Accepted 26 July 2023

Available online 27 July 2023

0959-6526/© 2023 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Abbreviations

TCR	Thermo-catalytic reforming
SGL	Solid Grade Laminate
CHNSO	Carbon Hydrogen Nitrogen Sulphur Oxygen
GC-MS	Gas Chromatography-Mass Spectrometry
H/C	Hydrogen/Carbon
O/C	Oxygen/Carbon
HHV	Higher Heating Value
TGA	Thermo-Gravimetric Analysis
BEIC	Birmingham Energy Innovation Centre
UK	United Kingdom

In recent years, many regulations and directives have been introduced aiming at discussing and supporting the most relevant aspects related to energy and the environment sector. One example is the Renewable Energy Directive (RED II), which proposed binding targets to limit first-generation biofuels and redirected public subsidies to advanced biofuels that are produced from second-generation biomass (<https://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:32018L2001&from=EN>, 2018).

In this regard, Solid Grade Laminate (SGL) can be considered a full-fledged second-generation biomass or a waste at the end of its life.

The material is mainly composed of Kraft paper compressed with melamine and phenolic resins for the surface layer and core layers, respectively under simultaneous application of heat and pressure. Kraft paper is also characterised by 76.2 wt% of cellulose, 16.2 wt% of hemicellulose and 7.6 wt% of lignin (Yang et al., 2018). The low content of lignin is due to the Kraft process, which consists of a delignification process aiming at breaking the bonds that link lignin, hemicellulose, and cellulose in wood chips under pressure and high temperatures (Bijok et al., 2022; Jardim et al., 2022).

SGL blocks are used in different applications as a construction material (Thébault et al., 2018; Tobiasson, 1990), furniture (Lepedat et al., 2010; Pizzi and Mittal, 2003) and electronics (Jux et al., 1974). Hence, it would not be surprising to find high volumes in the waste streams of manufacturing companies. Globally, it has been estimated that about 130 million tons of Kraft paper are annually produced via the Kraft process (Anil et al., 2018), even though it is not reported the actual quantity destined for solid grade laminate production. In the UK, the annual sale of laminate destined to the flooring market is approximately 30 million m² (<https://cfa.org.uk/userfiles/files/Zero%20Avoidable%20Waste%20in%20Flooring%20-%20A%20Scoping%20Study.pdf>, 2022) and it could represent a sustainable choice of feedstock if reused in large-scale biomass plants. Generally, SGL waste undergoes a collection process (with and without other mixed construction wastes). Afterwards, a recovery system for SGL can include reuse or recycling, disposal as incineration in waste-to-energy applications or storage in landfill (Yang et al., 2018).

The recovery of waste SGL blocks through the thermochemical process is still an unexplored field. No current research exists in this area as demonstrated by the lack of specific information in the literature and so it represents novelty to significantly reduce the environmental impact in waste management.

Kraft paper is characterised by cellulose, hemicellulose and lignin whose values are compared with wood and other lignocellulosic residues in Table 1. As Kraft paper is produced from wood pulp in a dedicated process, the composition of Kraft and pure papers are quite comparable. However, Kraft fibres have higher content of cellulose and lower content of both lignin and hemicellulose than wood, since they are subjected to the delignification treatment. The low lignin content in Kraft paper constitutes a benefit in terms of biofuel production derived from lignocellulose. Indeed, although lignin showed a great potential in

Table 1

Chemical composition of Kraft fibres.

	Unit	Lignin	Cellulose	Hemicellulose
Kraft fibres (Yang et al., 2018)	wt. %	7.6	76.2	16.2
Paper (Di Gruttola and Borello, 2021)	wt. %	0–15	85–99	0
Newspaper (Di Gruttola and Borello, 2021)	wt. %	18–30	40–55	25–40
Wastepaper from chemical pulps (Di Gruttola and Borello, 2021)	wt. %	5–10	60–70	10–20
Wood (Di Gruttola and Borello, 2021)	wt. %	18–32	40–44	15–35

producing fuels, value-added chemicals, and functional materials thanks to its high-energy density and intrinsic aromatic-based structure (Jardim et al., 2022; Hao and Mahdi, 2017), it is also a recalcitrant molecule that impedes accessibility to polysaccharide and then their transformation into commercially significant products. That is why the upstream removal of lignin is often mandatory in the pre-treatment of feedstocks to produce biofuels (Machineni, 2020).

Pyrolysis and gasification are usually employed for the thermochemical conversion of lignocellulosic material. However, pyrolysis and gasification differ among themselves in terms of operating conditions like the different conversion stages, temperatures, reactor design and gasifying agent which is absent in the pyrolysis. Different products are obtained from them: a solid (char and ash), a liquid/condensed fraction (tars and oil) and a non-condensable gas (syngas), whose yields differ according to the process as illustrated in Table 2.

Thermocatalytic reforming (TCR) represents another potential solution to convert such lignocellulosic material into valuable products as it combines the intermediate pyrolysis with the catalytic reforming. According to Table 2, intermediate pyrolysis obtains high yields in oil but also syngas and char, whilst, it was proved that the extra catalytic reforming step is essential for high product quality. Similar studies on TCR valorisation of other waste biomass are well demonstrated and are presented elsewhere (Schmitt et al., 2019; Neumann et al., 2016). Depending on reforming conditions specific targeted pyrolysis products can be formed and reforming using biochar derived from pyrolysis has been shown to deoxygenate volatiles leading to bio-oils with improved physical and chemical properties (Neumann et al., 2016).

The char also acts either as heat carrier for the upgrading pyrolysis oil or as a promoter for hydrogen formation. In this way, larger amounts of H₂, CH₄, and CO are also produced and less tar is generated at lower reforming temperatures. This is advantageous as typical state of art implements steam gasification, which can cause high tar content, and

Table 2

Mass balance and conditions for pyrolysis and gasification of woody biomass.

Type	Operating Conditions	Char wt%	Oil wt%	Syngas wt%	Ref.s
Slow pyrolysis	~300 °C, long solid residence time (hrs.-days)	35	30	35	Bridgwater (2012)
Intermediate pyrolysis	~400 °C, moderate solid residence time (min)	25	50	25	Bridgwater (2012)
Fast pyrolysis	~500 °C, short solid residence time (<2s)	12	75	13	Bridgwater (2012)
Flash pyrolysis	~600 °C, short solid residence time (<1s)	7	83	10	Bridgwater (2012)
Gasification	800–900 °C	53.8 ^a	3.5 ^a (tar)	82.92 ^a	Alamia et al. (2017)

^a Data are indicated as mean values.

further more energy intensive tar removal steps (Schmitt et al., 2019).

Finally, the reforming temperature affects not only the quality of bio-oil but also the yield of both gas and liquid products. The higher reforming temperatures, the higher gas yield and the lower liquid yield (Schmitt et al., 2019; Santos et al., 2020b).

Combination of reactor configurations is possible by designing the plant with a multi-zone auger reactor for the pyrolysis phase and a fixed bed post-reformer. This configuration allows separate operating conditions for both the pyrolysis and reforming, thus allowing high feedstock flexibility, high scalability, and high fuel quality in the TCR. The process can convert a wide range of second-generation biomass into hydrogen-rich syngas, high-quality oil and char without volatiles with yields based on the type of biomass and operating conditions.

According to the mass balances of several feedstocks (i.e. digestate, sewage sludge, sugarcane bagasse and oat hulls) tested in the TCR reactor in previous studies (Santos et al., 2020a; Santos et al., 2020b; <https://en.polyrey.com/sites/polyrey/files/docs/resources/ENV-EN-REYSIPUR-20160922.pdf>, 2016), the ranges of products mass yields are illustrated in the following Table 3.

Due to the high-pressure manufacturing process, SGL has high density (1350 kg/m^3) and low moisture content (1.5 wt%) (Thébault et al., 2018; Bridgwater, 2012). The former characteristic ensures a lower volume during both the transport and the storage phase and it influences how easily biomass can be ground for processing. The latter minimizes the weight during transport as well as avoids the drying process (Tanger et al., 2013). These properties facilitate the whole supply-chain of the thermo-catalytic reforming. Solid Grade laminate (SGL) also represents a new feedstock in the TCR process. Consequently, the goal of this research was to thermo-chemically process SGL using a lab-scale TCR reactor aiming at analysing its suitability as a new feedstock and its

$$\text{HHV} [\text{MJ} / \text{kg}] = 0.341 (C) + 1.1783 (H) + 0.1005 (S) - 0.1034 (O) - 0.0151 (N) - 0.0211 (A) \quad (1)$$

conversion into high-quality fuels. Hence, the characterisation of both the initial feedstock and the products was carried out. Results suggest that TCR could potentially be preferred to other pathways, such as fast pyrolysis, which does not produce hydrogen, and gasification, which does not produce liquids. Firstly, TCR is a well-thought-out technology as it combines in-situ two well-known thermochemical processes (i.e. pyrolysis and reforming) in a single reactor configuration. Secondly, all final products are valuable and can commercially be used. Finally, the plant has the capability to optimise separately the operating conditions for both pyrolysis and reforming, thus allowing high feedstock flexibility, high scalability, and high fuel quality in the TCR.

2. Materials and methods

2.1. Feedstock pre-treatment

For the present analysis, we used approximately 10 kg of dry SGL blocks. The feedstock was composed of more than 60 wt% of compressed Kraft paper layers and the remaining 30–40 wt% of phenolic resin for the core layers and melamine resin for the surface layer. Before TCR thermal conversion, it was first necessary to pre-treat the laminate. Hence, the material was shredded down by the HECHT 6420 device and further

Table 3
Typical mass yield ranges of TCR products.

	Char	Aqueous phase	Bio-oil	Syngas
Product yield wt%	20–50	19–34	2–15	25–50

sieved with a VWR test sieve, having a mesh size of 5.6 mm and a sieve diameter of 200 mm (according to ISO 3310-1).

2.2. Feedstock characterisation

2.2.1. Proximate analysis

A small sample size of approximately 20 mg was subjected to pyrolysis via Thermo-Gravimetric Analysis (TGA) under a N_2 atmosphere to determine its proximate composition in terms of moisture, volatiles and fixed carbon content. The sample was also tested under TGA combustion to determine its total ash content. The instrument used for TGA was a NETZSCH TG 209 F1 device heating up to a maximum temperature of 900°C , with a heating rate of 10 K/min and a total flowrate of purge gas of 50 ml/min (according to BS EN 15148:2009).

2.2.2. Ultimate analysis

The SGL was sent to an external accredited laboratory, Medac Ltd, where the elemental content was quantified. Carbon, Hydrogen, Nitrogen, Sulphur and Oxygen (CHNSO) content was analysed using the CHN and Eltra Helios (S) analysers following the ISO 16948:2015 and ISO 16994:2016 standards. Then, the oxygen was determined by difference, taking into account the ash content determined by TGA.

2.2.3. HHV

The HHV was calculated by using the unified correlation for fuels (1), namely the Channiwala equation, starting from carbon, hydrogen, sulphur, oxygen, nitrogen and ash weight fraction, respectively. The Channiwala equation shows a good correlation to compute the HHV in the absence of the bomb oxygen calorimeter (Channiwala and Parikh, 2002).

2.3. The TCR experimental procedure

2.3.1. The TCR setup

The TCR-2 bench scale reactor (Fig. 1) is located at the University of Birmingham and has the capacity to process up to 2 kg/h of feedstock. The plant works in an oxygen-free environment by applying a nitrogen purge at around 100 mbar inside both the feed hopper (1) and the pyrolysis auger reactor (2). The temperature in the reactor can be set between 500 and 700°C . The biomass is manually fed in the auger reactor. The auger reactor represents a very reliable and affordable solution for pyrolysis thanks to its simplicity of construction and operation, among different possible configurations (Resende, 2014b). The reactor comprises two co-axial rotating screws powered by two different electrical engines, thus allowing easy regulation and control of solid residence times through the reactor. This represents an advantage in terms of modularity and avoiding blockage risk, always possible in case there was a single screw. The inner screw conveys the biomass through 1 m in length of the reactor, while the outer screw connects the reactor with the fixed-bed post-reformer (3). In the post-reformer, the catalytic cracking of vapours and reforming reactions occur at higher temperatures (650 – 800°C) between char and pyrolysis vapours to form condensable organic vapours and synthesis gas (or syngas). Both volatile vapours and permanent gases pass through a gas cleaning system which consists of a cyclone (4) for the removal of fly ash, followed by a shell and tube water-cooled heat exchanger (5) to quench the gases and condense out the volatile components. The scrubber (6) removes other contaminants such as solid particulate in the gas flow. Hence, the condensable gas is collected in the external oil vessel (7), while the non-condensable gas goes through the filtration unit for the removal of the remaining

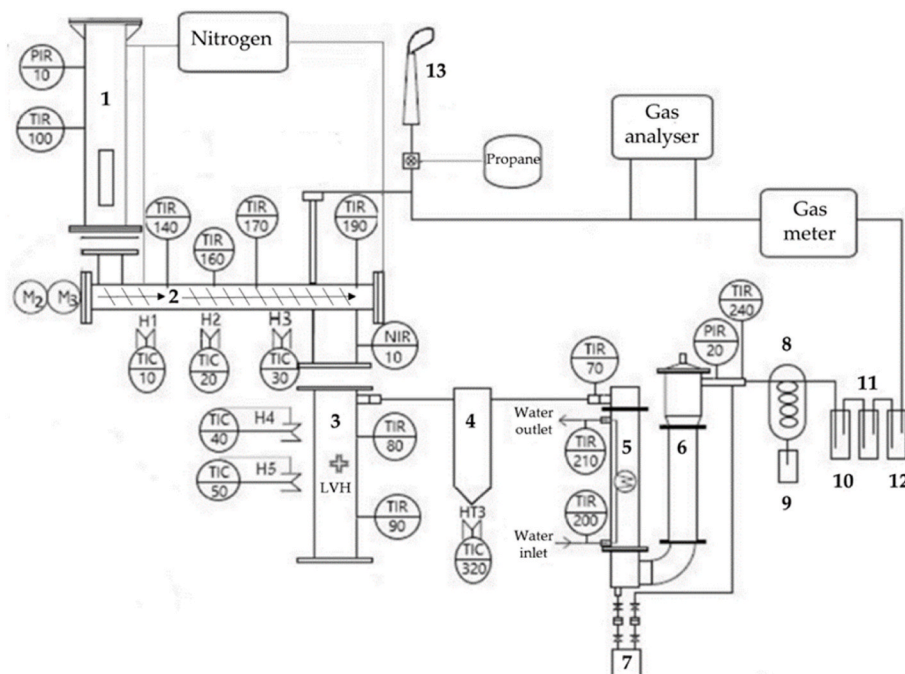


Fig. 1. The Process schematic diagram of the TCR-2 (2 kg/h): (1) Feed hopper; (2) Auger reactor; (3) Post reformer; (4) Cyclone; (5) Shell and tube heat exchanger; (6) Scrubber; (7) Oil collection vessel; (8) Ice bath; (9) biodiesel wash bottle; (10) Iso-propanol wash bottle; (11) Acetone wash bottle; (12) wool bottle; (13) Flare (Fivga et al., 2020).

aerosols, fine particles and other contaminants. The filtration system consists of a series of gas wash bottles containing ice (8), biodiesel (9), isopropanol (10), acetone (11) and wool (12). Biodiesel, isopropanol and acetone act as solvents to clean pre-contaminants in the syngas produced during the intermediate pyrolysis and the catalytic reforming such as dust, tars, corrosive compounds (sulphur, chlorine and nitrogen), alkali and heavy metals delivered by wastes or second-generation biomass (Gas analysis in gasification of Biomass and Waste, IEA Bio-energy, 2018). In particular, biodiesel is usually used as a trap for heavy hydrocarbons and tars (Neef et al., 2008), while isopropanol and acetone easily dissolve tars (Paethanom et al., 2012). In addition, the wool bottle captures further solid particles like particulate and tars. Finally, a gas analyser detects the clean gas before permanent gases are flared with propane (13). The gas analyser was fitted with an upstream carbon bag filter to protect the device from harmful contaminants and particulates. To heat the TCR system, external electrical heating tapes are used. The operating temperature is measured and controlled through several K-type thermocouples installed all along the unit. The process control is performed using a Siemens SIMATIC WinCC software developed by Fraunhofer UMSICHT, where the analysed parameters can be changed in a wide range of options.

2.3.2. The TCR methodology

Before running the experiment, the TCR-2 plant was cleaned, closed and flushed with N_2 at 80–100 mbar to remove the oxygen from the pyrolysis reactor and to test if there was any leakage from the system. Once the gas analyser detected an oxygen content below 0.5 vol% in the plant, the N_2 flow was stopped. During the experiment, the temperature in the auger screw reactor was gradually increased up to 500 °C until it reached the intermediate pyrolysis conditions before the introduction of SGL. In the post-reformer stage, the temperature was set to 650 °C. The setting of both the pyrolysis and the reforming temperatures was decided beforehand according to the TGA analysis of the specific feed-stock. During the heating process, the rotating screws were turned on and the speeds of the inner and outer screws were calibrated to have a residence time of about 40 min corresponding to the intermediate

pyrolysis condition. Once the TCR reached steady temperatures, the screw in the auger reactor was stopped and the sealed hopper was opened to feed the plant with 4.6 kg of SGL. Afterwards, the feed hopper was closed, and the unit was flushed with N_2 again to decrease the oxygen below 0.5 vol%. When the N_2 flow was stopped, the first screw in the auger reactor was turned on to push the biomass along the TCR-2. The formation of the carbonised biomass produced as char in the auger screw reactor promoted an internal catalytic effect, thus improving the quality of the TCR-2 products and avoiding the exit of fine particles and dust from the post-reformer. The char and permanent gases formed in the auger reactor were then transported to the post-reformer by the screw. There, the residence time was regulated through the screws speed of the auger reactor. The post reformer had the double function of collecting the char produced from the previous step and converting the permanent gases into a syngas rich in H_2 , due to the catalytic effect caused by the reactions between the char, acting as active carbon, and the pyrolysis vapours. During the reforming process, the condensable organic vapours were catalytically upgraded, thus enhancing their chemical and physical fuel properties and reducing tars. The char rich in carbon and with low hydrogen and oxygen contents remained in the post-reformer until the end of the experiment. Subsequently, the upgraded organic vapours were quenched at −5 °C in the condensing unit to guarantee a complete separation between the pyrolysis liquid and the gas fraction. The pyrolysis oil was collected and stored in an external vessel. Then, the remaining non-condensable vapours passed through the filtration unit for the removal of aerosols, fine particles and other contaminants. The cleaned gas was directly measured and analysed via an online gas analyser.

TCR-2 experiments took around 4 h to be stabilised and completed. The plant worked in a semi-continuous mode with an overpressure of approximately 70–100 mbar controlled by a pressure indicator and the TCR software. The volume of synthetic gases was registered every 10–15 min. When no gas production was observed, the experiment was considered concluded and, consequently, the heaters and auger reactor screws were switched off. The plant was left to cool down for at least 24 h. Afterwards, the auger pyrolysis reactor was cleaned from unconverted

residues via a vacuum cleaner. The post-reformer was emptied by extracting the solid char produced from the bottom. The dust and fine particles, deriving from char, in the gas tube of the reforming unit were removed to prevent blockages in the following trials. Lastly, the condensing unit was cleaned to avoid contamination between different oils produced in different experiments with different operating conditions. All the products obtained from the cleaning were weighted and included in the mass balance. The washing bottle connected to the ice bath after the condensing unit was refilled with 600–700 ml of biodiesel, isopropanol and acetone. In the filtration unit, activated carbon, candle and glass wool filters were weighed, replaced and connected to the plant again. For the mass balance, all the liquids collection vessels, filters and wash bottles were weighed. Additionally, the char from the post-reformer was collected, separated and weighed, and a sample was sent for analysis to an external lab. Because of the different densities, the organics and the aqueous phase were separated after 24 h using a separating funnel. Afterwards, they were separately stored, measured and sent for their characterisation to an external lab. The permanent gas data were further analysed.

2.4. Products characterisation

2.4.1. Water content

The water content of the raw laminate oil was determined using a Mettler Toledo V20S compact volumetric Karl Fischer titration in accordance with ASTM E203.

2.4.2. Oil and char ultimate and proximate analyses

Pyrolysis oil and char samples were analysed applying the same method already described in (2.2.1) and (2.2.2) for the determination of the elemental compositions (C, H, N, S and O). Regarding oil, the oxygen was determined by difference as described in the following (2), assuming ash content approximately lower than 0.001 wt%:

$$O [\text{wt}\%] = 100 - \sum (CHNS + \text{ash}) - \text{water} \quad (2)$$

The water content is computed as illustrated in (2.4.1).

Furthermore, a complete CHNSO analysis was made for char, while the ash content was computed by difference, by reversing (2) and neglecting the water content.

2.4.3. HHV

The HHV of the bio-oil and char was determined using the unified correlation for fuels as described in (2.2.3).

2.4.4. Viscosity

The dynamic viscosity of oil was tested by IKA ROTAVISC (according to DIN 53019) at the temperature of 23.2 °C and with a rotational speed of 100 rpm. The instrument measured the resistance of the oil to flow when an external (rotational) force was applied, without considering the fluid density (or the inertial force).

2.4.5. Density

The pyrolysis oil density was measured by Academy Glass Measuring Cylinder at 20 °C having a total volume of 100 ml and a tolerance of ± 1.0 ml.

2.4.6. Gas chromatography/mass spectrometry (GC-MS)

The chemical compounds of the oil were detected by a two-dimensional gas chromatography and mass spectrogram GC-MS Agilent 8890. The separation technique allowed counting the peak value due to the presence of organic compounds at a specific retention time by two detection columns and modulator. The gas used as a carrier was H₂ and the oil samples were dissolved in dichloromethane (DHM). The concentration of oil was 1%. Afterwards, the compounds were identified by library searches (NIST libraries).

2.4.7. Gas analysis

During TCR, the produced syngas was frequently measured and analysed using a Pollutek GAS 3000P Syngas Analyser. The measurement principle of the gas analyser is based on Non-Dispersive Infrared (NDIR) sensor (CO, CO₂, CH₄, C_nH_m), a thermal conductivity sensor TCD (H₂) and an electron capture (ECD) detector (O₂) (Available online, 2022a).

2.4.8. Mass and energy balances

The mass and energy balances represent the statements on the conservation of mass and energy. The mass balance was computed by weighting the initial material and collecting and weighting char and liquid fraction (oil and water) after the TCR experiment. Consequently, the syngas yield was computed by difference. Any mass loss due to weight measurement errors, non-detectable gases by the gas analyser and the remained oil in the cleaning section were not considered.

The energy balance shows how the energy of the initial feedstock was distributed in time unit among its products during the TCR conversion process. It was computed through the following equation:

$$Q_i [\text{MW}] = \sum_i \dot{M}_i \left[\frac{\text{kg}}{\text{s}} \right] \bullet HHV_i \left[\frac{\text{MJ}}{\text{kg}} \right] \quad (3)$$

Where Q is the output energy power of each i-th final product (i.e. char, oil and syngas) according to its mass flow rate \dot{M}_i and higher heating value (HHV).

3. Results and discussion

3.1. Feedstock characterisation

A small sample of 20 mg of SGL was subjected to TGA under both pyrolysis (N₂ as a purge gas) and combustion (air as a purge gas) conditions and their profiles are presented in Figs. 2 and 3, respectively.

Under pyrolysis conditions (Fig. 2), the weight loss of moisture and volatiles was evaluated, and the fixed carbon was obtained by the difference between the total mass and the moisture and volatiles fractions in percentage. Fixed carbon content gives information about the amount of char formation in the thermochemical process after the release of volatile matter. The value is equal to 31 wt%, meaning that one-third of the initial feedstock can be used as char (and ash) in the post-reformer. The objective of using those carbonaceous substances is to exploit their influence in terms of catalytic action capacity.

Fig. 2 shows a weight loss of 1.5% in moisture from ambient temperature (25 °C) to 105 °C. In the range between 105 °C and 260 °C, there was another mass change of 7.41%, due to the volatilisation of Kraft paper. This behaviour fits well with other results available in the literature which suggest that Kraft paper releases volatiles starting from 150 °C (Batuer et al., 2019). The majority of volatiles were then released between 240 °C and 390 °C, which contributed to approximately 36% weight loss. This result matches the degradation temperature of melamine resin, whose volatilisation values range between 250 °C and 400 °C (Batuer et al., 2019). The successive peak was noticed between 400 °C and 470 °C, indicating a release of phenol resin and cellulose, as reported previously in Girods et al. (2008), Torres-Herrador et al. (2021).

The combustion analysis (Fig. 3) showed a weight loss of 1.62% from moisture release at temperature from 25 °C to 105 °C. In the range between 150 °C and 250 °C, there was a small mass decrease of 9.72%, which is attributed to the starting point of Kraft paper combustion (Batuer et al., 2019). Then, volatile products from cellulose combustion were combusted between 270 °C and 390 °C and then again there was a peak between 400 °C and 450 °C due to the combustion of the resins content in the SGL (Girods et al., 2008; Torres-Herrador et al., 2021; Shoji et al., 2014) with an overall weight loss of about 51.5%. As soon as the laminate was burnt between 500 °C and 600 °C under air conditions,

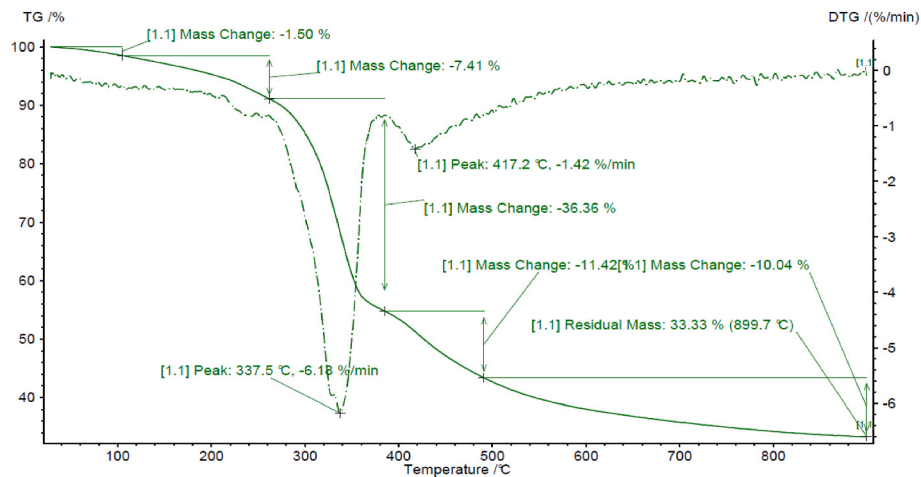


Fig. 2. TGA/DTG pyrolysis profile solid grade laminate.

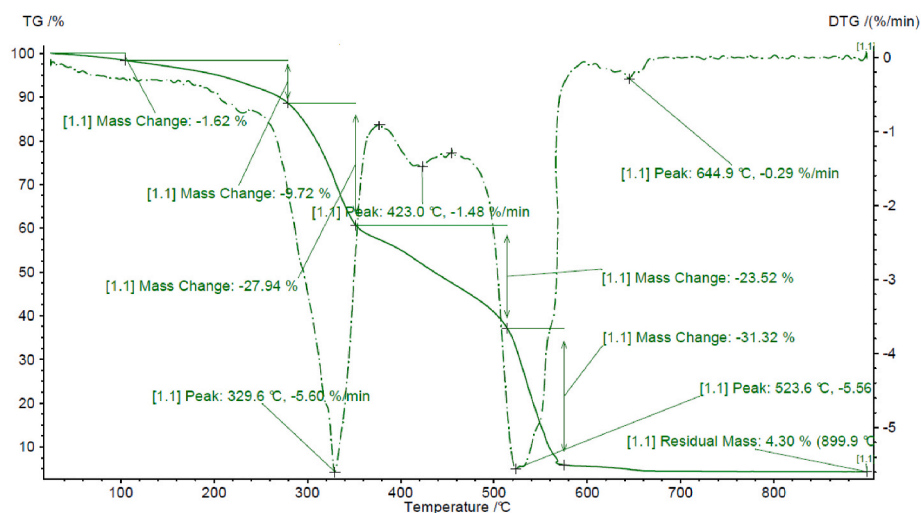


Fig. 3. TGA/DTG combustion profile solid grade laminate.

Table 4

Proximate and ultimate analysis of solid grade laminate.

	Units	Result
Proximate Analysis		
Moisture	wt%	1.5
Volatiles	wt%	65.2
Fixed Carbon	wt%	29.0
Ash	wt%	4.3
HHV	MJ/kg	18.6
Ultimate Analysis		
C	wt%	44.4
H	wt%	5.9
N	wt%	7.8
S	wt%	0.48
O ^a	wt%	35.62

^a Calculated by the difference.

fixed carbon was released obtaining stable mass at lower temperature than that obtained from the pyrolysis trial in the same temperature range. The weight loss at that temperature accounted for 31.3%. The ash content was 4.3 wt%, therefore, the stable solid carbon formed during pyrolysis at this temperature range was around 29%.

The proximate and ultimate analysis for the TGA of SGL are shown in Table 4.

The HHV was determined by using the unified correlation for fuels and the resulting value is equal to 18.6 MJ/kg similar to the value measured for woody materials. The ash content of SGL was evaluated as the residual mass after the combustion (as already illustrated in Fig. 3). The oxygen was determined by difference, considering the ash content equal to 4.3 wt%.

Both the nitrogen and sulphur contents give information about the possible formation of SO_x and NO_x emissions during the thermochemical process (e.g. pyrolysis and gasification). Therefore, lower values correspond to lower emissions. Nitrogen is also an inert element, meaning that it does not react during the conversion process. However, NO_x deriving from TCR was not expected, as temperatures were under the threshold required for the formation of thermal NO_x. If compared with woody biomass, Nitrogen and Sulphur were found to be higher for SGL, with concentrations approximately 4 x higher for nitrogen and 5 x higher for sulphur content (Sattara et al., 2014). However, these heteroatoms can effectively be removed from the TCR syngas by utilising downstream scrubbers, this has been proven at larger TCR scales.

The initial atomic O/C and H/C ratios of solid grade laminates are 0.6 and 1.59, respectively. These values are comparable with lignocellulosic biomass ratios as reported in Trif-Tordai and Ionel (2011). However, SGL's H/C ratio was higher than wood, thus suggesting a good initial HHV.

Finally, the optimal pyrolysis and reforming temperatures for TCR

test were also found from TGA analysis. They turned out to be 500 °C and 650 °C, respectively. The former was due to the release of the majority of volatiles from the feedstock, whilst the residual mass remained almost unchanged after 650 °C as illustrated in Figs. 2 and 3. Furthermore, from previous studies it is shown that TCR oil has more calorific values from 600 to 700 °C (Santos et al., 2020b; Bashira et al., 2022).

3.2. Mass balance and energy balance

After the TCR process, the mass balance and the energy balance for laminate were computed and shown in Fig. 4. Regarding the mass balance, 50 wt% of the initial feedstock was converted to syngas, 28 wt% to char (and ashes) and 22 wt% to a liquid fraction containing both water and organics.

According to the energy balance the majority of the energy moves from feedstock to syngas and char with a percentage of 56% and 39% respectively. The remaining 5% is characterised by pyrolysis oil. The energy balance only considers the chemical energy transferred from the feedstock to the products. Approximately 20% of the total chemical energy from the feedstock is required as heat input to the process (Ouadi et al., 2019). This energy could potentially derive from the downstream thermal conversion of the biochar or syngas. There is sufficient energy in these vectors to satisfy the heat demand of the plant.

In Fig. 5, the Van Krevelen diagram is shown to highlight the H/C and O/C ratios of laminate and its products obtained from TCR. The diagram represents the degree of stability of the initial feedstock in terms of char decomposition, showing similar properties to wood. Regarding TCR products, although, both laminate oil and char had approximately the same O/C ratio, meaning that they lost many oxygenated compounds in favour of major carbonisation, the oil shows a greater H/C ratio, due to the presence of a high amount of hydrogen, thus contributing to a good value of its HHV. The heating value of the oil was found to be 32.72 MJ/kg, which is almost double that of the original solid grade laminate. The increase in the calorific value was due to the catalytic reforming and cracking occurring in the post-reformer. As already shown in literature, the reforming process converts feedstocks in fuel with higher octane numbers, lower oxygen content and tar and more aromatics, thus contributing to get the best properties out of pyrolysis oil (Speight, 2020; Zheng et al., 2022). As a matter of fact, a higher-octane number of fuel leads to a lower volatility and a major compression in the internal combustion engines (Xiang et al., 2022) and the lower oxygen content increases the HHV (Tanger et al., 2013).

Even though the laminate oil has a lower H/C ratio and a higher O/C ratio when compared with conventional heavy fuel oil and fossil fuels, it shows a closer agreement with their characteristics than typical oil from fast pyrolysis of wood as illustrated in Fig. 5 (Santos et al., 2020a). Heavy oil, gasoline and diesel fuel have higher HHV than laminate oil with their corresponding values of 41.8, 46.4 and 45.6 MJ/kg, respectively (https://www.engineeringtoolbox.com/fuels-higher-calorific-values-d_169.html, 2022). The presence of oxygen in the laminate oil, which is about zero in conventional fuels, negatively influenced its HHV. Therefore, a de-oxygenation process for pyrolysis oil is desirable in

any pyrolysis process.

For the sake of clarity, the HHV values of the above-mentioned fuels are reported in Table 5.

3.3. Pyrolysis oil analysis

The liquid products (oil and water) accounting for 22 wt% of the weight and deriving from TCR, were left to settle for 24 h to separate water from the organics (Fig. 6) and a clear phase separation was observed. Afterwards, both liquids were weighted, and the percentages of oil and aqueous phase were 5 wt% and 17 wt%, respectively (as previously shown in Fig. 4). The oil yield from SGL resulted slightly lower than that obtained from other TCR trials with sugarcane bagasse, oat hulls, and sewage sludge at the same pyrolysis temperatures (Santos et al., 2020a; Bashira et al., 2022). However, the oil yield is expected to decrease when the reforming temperature increases, as also shown in Santos et al. (2020b) for sugarcane bagasse and oat hulls, since other volatiles are released during the reforming, thus enhancing the syngas yield. To obtain an increased oil yields against syngas production, the TCR process should be performed at a lower reforming temperature and considering the use of externally sourced catalysts such as steel slag (Bashira et al., 2022; Santos et al., 2020c) which has been found to lower reforming temperatures whilst retaining high yields of hydrogen production.

After the separation, the 5 wt% of pyrolysis oil was analysed. Its water content was equal to 7.21% on average, resulting about 2–4 times lower than common bio-oils (Cheng et al., 2016). This result confirmed the finding that the heating value of such oil is equal to 32.72 MJ/kg (Table 5), significantly higher than other bio-oils, even though it is still lower than the heavy fuel oil, whose water content is around 0.10% (Cheng et al., 2016). This difference suggests the presence of oxygenated compounds in the pyrolysis oil, which leads to reduced physical and chemical properties (Cheng et al., 2016). The sulphur content was found to be 0.65 wt%, slightly higher than that in the feedstock (0.48 wt%). This is partly due to the reproducibility of the experimental method which is related to the accuracy of the instrument (Santos et al., 2020c) and partly to the major concentration of sulphur in the oil solution sample (Bashira et al., 2022).

The dynamic viscosity of oil was 31 mPa s at a temperature of 23.2 °C, lower than heavy fuel oil, whose value is about 230 mPa s at 30 °C (Cheng et al., 2016). Viscosity represents an important property for fuels especially if used in unmodified internal combustion engines. As studied in Tesfa et al. (2010), higher viscosity not only affects the mechanical characteristics of the engine, but also its performance and emissions. In fact, higher viscosity results in poor fuel atomization, carbon deposition on fuel filter, more energy demand from the fuel pump and thus more wear of pumps and injectors. Consequently, the slow-moving of oil causes the combustion of a lean mixture and influences the start-up of the injection and its pressure. The overall properties of SGL oil are shown in the proximate and ultimate analysis reported in Table 6.

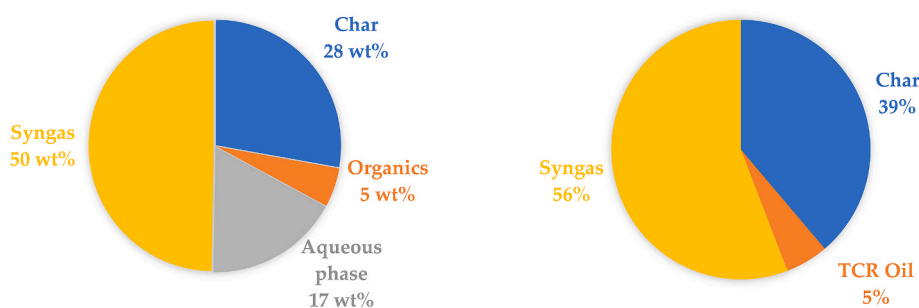


Fig. 4. Mass balance (on the left) and Energy balance (on the right) of Solid Grade Laminate.

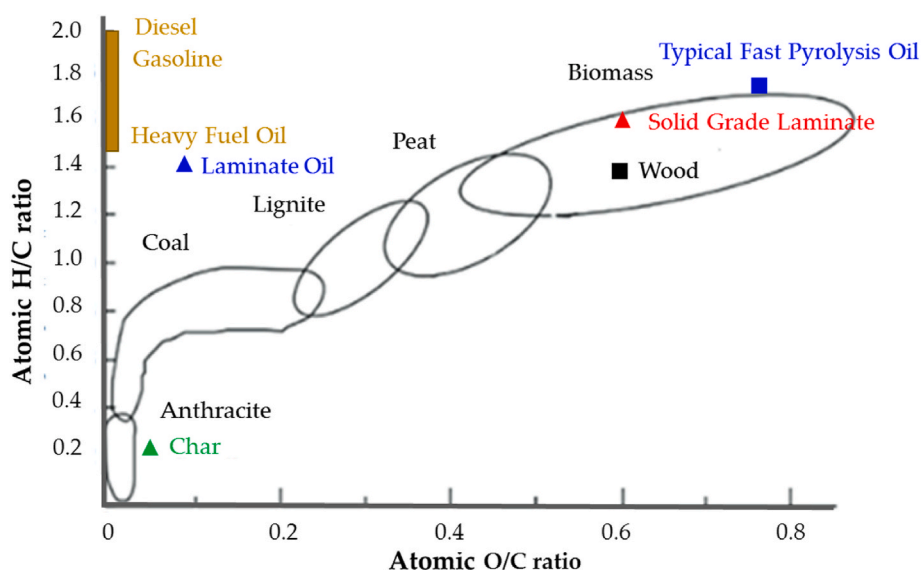


Fig. 5. The Van Krevelen diagram (Trif-Tordai and Ionel, 2011) with the H/C and O/C ratios evaluated for conventional fuels, typical fast pyrolysis oil, wood, SGL and its products from TCR (char and laminar oil).

Table 5

The calorific values of different fuels.

Fuels	HHV [MJ/kg]	Ref.s
Solid Grade Laminar	18.6	Experimental values
Laminar oil	32.72	Experimental values
Heavy oil	41.8	https://www.engineeringtoolbox.com/fuels-higher-calorific-values-d_169.html (2022)
Gasoline	46.4	https://www.engineeringtoolbox.com/fuels-higher-calorific-values-d_169.html (2022)
Diesel	45.6	https://www.engineeringtoolbox.com/fuels-higher-calorific-values-d_169.html (2022)
Typical fast pyrolysis oil	17.0–22.5	Bridgwater et al. (1999)

3.3.1. GC-MS analysis

To detect and identify the organic compounds in the pyrolysis oil deriving from TCR, two-dimensional gas chromatography and mass spectrogram were computed.

In Table 7, the chemical compounds are reported with their molecular formula, group name, peak value and retention time deriving from the GC-MS analysis.

According to the peak values, the oil revealed a composition rich in aromatics, phenols and furans.

The aromatics and cycloaromatic hydrocarbons had the highest peak values in the oil as represented in Fig. 7, thus suggesting promising oil properties, as these chemical compounds are present in most conventional fuels. The presence of phenols in the GC-MS results indicated that some of the resins were transferred to the oil. Further investigation would be required to understand in detail the influence of each component within the feedstock on the products and evaluate any copyrolysis effect occurring.

However, phenols and furans deriving from resins, hemicellulose and lignin present in the feedstocks and detected in the laminar oil were not abundant. However, they contain nitrogen and oxygenated compounds that reduce the calorific value (equation (1)). It could be possible considering a successive hydrotreatment process to remove phenols and oxygenated substances thus further increasing the HHV of the resulting oil.



Fig. 6. Aqueous phase (on the left) and pyrolysis oil (on the right) of Solid Grade Laminar.

Table 6

Laminate oil characterisation.

	Units	Result
Proximate Analysis		
Water	wt%	7.21
Ash	wt%	<0.001
HHV	MJ/kg	32.72
Viscosity	mPa·s	31
Density	kg/m ³	856
Ultimate Analysis		
C	wt%	69.12
H	wt%	8.27
N	wt%	3.46
S	wt%	0.65
O ^a	wt%	11.29

^a Calculated by the difference.


3.4. Gas analysis

The syngas represents the gaseous fraction made of CO, CO₂, H₂, CH₄ and light hydrocarbons (typically consisting of C1–C4), whose values were recorded during the TCR process once the volume of oxygen reached values below 0.5 vol% and then normalized with respect to the volume of oxygen and nitrogen, as shown in Fig. 8. Hydrogen represented almost 50 vol% of the syngas, while carbon monoxide, carbon dioxide and methane ranged between 15 and 25 vol% and the light hydrocarbons fraction were considered negligible. However, the syngas composition changed overtime. Indeed, there was a time interval where H₂ and CO reached the maximum, whilst CO₂ and CH₄ had a minimum. The reason for such a pattern might be related to the pyrolysis temperature. Although it was set at 500 °C, the volatiles that were released during the pyrolysis, increased the temperature, leading to a decrease in the fraction of CO₂ and CH₄, thus allowing an increase of H₂ and CO. Additionally, the higher pyrolysis temperature inhibits the degradation of hemicellulose and cellulose thus reducing the formation of CO₂ that

Table 7

Chemical compounds detected and identified by GC-MS of the Solid Grade Laminate.

Chemical compound	Molecular Formula (Available online, 2022b)	Group Name	Retention I (min)	Peak Value
1,3,5-Cycloheptatriene	C ₇ H ₈	Aromatic	4.66	85663.73
p-Xylene	C ₈ H ₁₀	Aromatic	6.34	68358.30
Benzene, 1-ethyl-2-methyl-	C ₉ H ₁₂	Aromatic	8.25	24007.01
Benzene	C ₆ H ₆	Aromatic	3.46	22506.99
Ethylbenzene	C ₈ H ₁₀	Aromatic	6.18	16815.06
Benzofuran	C ₈ H ₆ O	Furan	8.85	13618.73
Chromium, tricarbonyl [(1,2,3,4,5,6- <i>n</i>)-1,3,5,7-cyclooctatetraene] -	–	Cycloalkenes (aromatic)	6.78	11139.36
1H-Pyrrolo[2,3- <i>b</i>] pyridine, 2-methyl-	C ₈ H ₈ N ₂	Pyrrolopyridines (aromatic)	10.83	9764.16
Benzyl alcohol	C ₇ H ₈ O	Alcohol	10.08	9065.15
1H-Benzimidazole, 5,6-dimethyl-	C ₉ H ₁₀ N ₂	Aromatic	13.07	8566.90
Phenol, 4-ethyl-	C ₈ H ₁₀ O	Phenol	11.04	7636.60
Cinnamaldehyde, (E)-	C ₉ H ₈ O	Aldehyde	10.99	7102.42
2,4,5-Trihydroxypyrimidine	C ₄ H ₄ N ₂ O ₃	Pyrimidine (aromatic)	12.59	6083.76
2-Propenal, 2-methyl-3-phenyl-	C ₁₀ H ₁₀ O	–	12.88	5569.08
o-Xylene	C ₈ H ₁₀	Aromatic	6.78	5331.62
1,3,5-Cycloheptatriene, 1-methoxy-	C ₈ H ₁₀ O	Aromatic	11.85	5157.36
p-Cresol	C ₇ H ₈ O	Phenol	10.54	5018.91
1,2-Dimethylindol-4-amine	C ₁₀ H ₁₂ N ₂	–	14.71	4582.31
Cyclohexene, 1-(1-propynyl)-	C ₉ H ₁₂	Aromatic	8.07	4546.32
1,5-Heptadien-3-yne	C ₇ H ₈	Enynes	3.57	3779.06

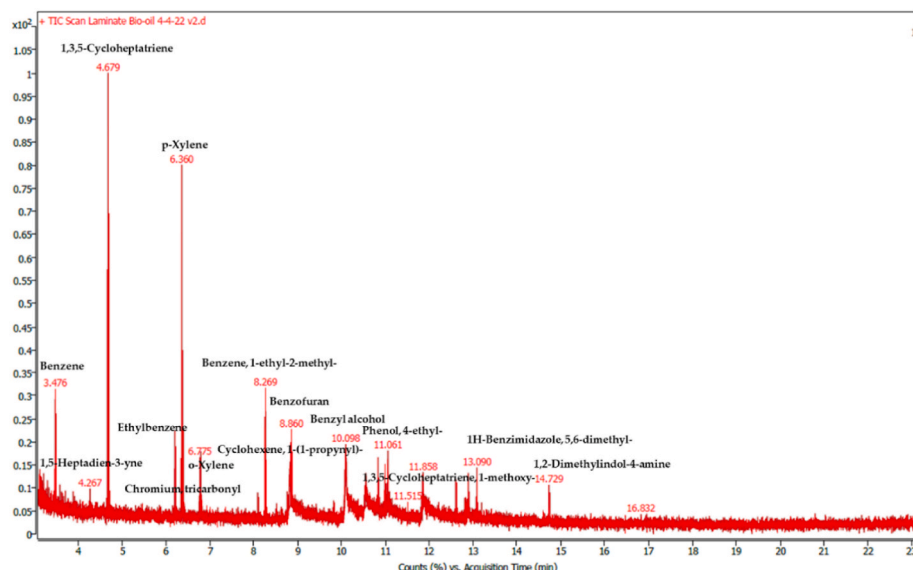**Fig. 7.** 1D representation of GCxGC results of Laminate Oil.

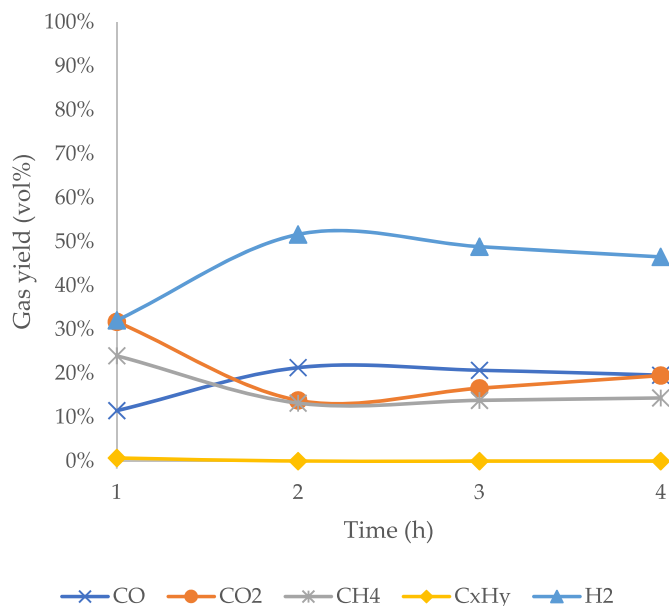


Fig. 8. Gas analysis over time during the TCR experiment.

Table 8
Reactions during pyrolysis.

Reaction	Equation	ΔH° [KJ mol ⁻¹]
Steam reforming: CH ₄	$CH_4 + H_2O \leftrightarrow 3H_2 + CO$	206.2
Water gas (primary reaction)	$C + H_2O \leftrightarrow H_2 + CO$	131.3
	$C + 2H_2O \leftrightarrow 2H_2 + CO_2$	90.1
Boudouard	$C + CO_2 \leftrightarrow 2CO$	172.5

could be released by the cracking of carboxyl and carbonyl compounds. On the contrary, the lignin can be easily decomposed at higher temperature, thus releasing much more hydrogen derived from its aromatic ring and methyl group (Yang et al., 2007; Uddin et al., 2014). Finally, the increase of CO could be also related to all endothermic reactions occurring at higher temperatures and reported in the following Table 8.

Another possible explanation for such a behaviour of gases could be due to the stabilisation time of TCR reactor. In fact, the post-reformer needed time to collect char and reformat the gas during the whole process. Consequently, more oil and less syngas were expected at the beginning because of the low char content in the post-reformer. Later, the increase of char led to H₂ and CO formation resulting from reforming reactions. Once the char was stabilised in the post-reformer, catalytic reactions occurred, thus increasing CH₄ and CO₂ yields (Santos et al., 2020c; Asif Bashir et al., 2020).

Afterwards, the behaviour reached a steady condition, with values constant until the end of the experiment.

Regarding the calorific value of syngas, it was calculated and based only on the combustible fraction (CO, H₂, and CH₄) of the gas, discounting N₂ and CO₂. Hence, the HHV of syngas was equal to 20.11 MJ/kg, which was greater than the initial feedstock.

3.5. Char analysis

The char (Fig. 9) intended as a residual mass (ash included) represented 28 wt% of the initial feedstock. The amount of solid carbon formed during TCR process was lower than during pure pyrolysis as shown in Fig. 2. This was due to both the longer residence time in TCR and the continuous contact with syngas and vapours where carbon was gasified, thus reacting with H₂O and CO₂ accordingly to reactions in Table 8 (Santos et al., 2020c; Hornung et al., 2022). Char is a carbonaceous high-molecular-weight residue with ash, inert material and



Fig. 9. Char of solid grade laminate.

Table 9
Laminate Char characterisation.

	Units	Result
Ultimate Analysis		
C	wt%	71.83
H	wt%	1.56
N	wt%	1.49
S	wt%	<0.10
O	wt%	5.09
Ash ^a	wt%	20.03
HHV	MJ/kg	25.94

^a Calculated by difference.

metals and it can be used as a catalyst as it exhibits catalytic activity favouring higher yields of non-condensable gases (Ronsse et al., 2015). The catalytic effect of char is used not only for tar cracking, but also to de-oxygenate volatile compounds. This is especially true when using high ash-containing feedstocks such as sewage sludge and de-inking sludge (Asif Bashir et al., 2020; Ouadi et al., 2013). These results were investigated in a patented Pyroformer whose patents are reported in Hornung et al. (2009), Hornung and Apfelbacher (2009), Jahangiri et al. (2021).

The char characteristics are reported in Table 9. As expected, only carbon and ash contents increased with respect to the initial feedstock (Table 4), by 1.6 and 4.7 respectively, while the remaining elements decreased. The presence of metals within the ash could certainly influence catalytic activity in TCR system (Santos et al., 2020c). Previous studies for example using sewage sludge showed a direct relationship between ash content and catalytic cracking in the TCR (Bashira et al., 2022; Hornung et al., 2022). However, ICP assessment was not carried out to determine which metals were present within the ash. During post reforming, the char itself is active as a catalyst, no external catalysts are therefore necessary during the process. The extended vapour residence times, reforming temperatures, and char to vapour interactions with the post reformer is effective in promoting mono-cyclic aromatics in the bio-oil. The char also has an important function in promoting water gas shift reactions, steam methane reforming reactions and Boudouard reactions, for the production of CO and H₂. This can be seen from the decrease of CO₂, increase of CO and decrease of CH₄ with increase of H₂ (Fig. 8). From the energy point of view, the calorific value of char was equal to 25.94 MJ/kg, which was higher than the initial HHV of laminate (18.6 MJ/kg). This result suggests its further potential use as a fuel in other thermal and thermochemical processes like combustion, co-combustion or gasification.

Other potential purposes are its application as a soil amendment or as an adsorbent material. Indeed, char can remain in the soil for years due to its high stability, thus improving the soil quality. However, its heavy metal composition must be analysed to avoid the release of toxic compounds or other negative impacts in terms of soil properties variations.

Finally, char can be used as an adsorbent to remove pollutants, heavy metals or contaminant gases (Argudo-Santamaria et al., 2020).

4. Conclusions

In this research, the waste solid grade laminate (SGL) was subjected to TCR consisting of intermediate pyrolysis at 500 °C and post-catalytic reforming at 650 °C, both occurring at standard pressure.

The aim was to characterise a new material not yet investigated in literature as energy source in a pre-commercial technology such as TCR as well as its final products (char, oil and hydrogen-rich syngas) as alternative fuels. Such characterisation helped to determine the feasibility of SGL in the thermo-catalytic reformer according to its physicochemical properties and operating conditions and eventually to understand how the mass and the energy of SGL were distributed between its final products.

Based on the ultimate and proximate analyses, the solid grade laminate showed similar properties to wood in terms of oxygen, hydrogen and carbon content even if sulphur and nitrogen were found to be higher. The feedstock was already dried according to the low moisture content found in the TGA and its HHV was equal to 18.6 MJ/kg, thus showing a good quality to be used directly as a fuel in other processes (e.g. incineration, combustion and gasification).

In accordance with the mass and energy balances, TCR showed that half of SGL was converted to hydrogen-rich syngas with a high calorific value (20.11 MJ/kg), thus allowing it to be involved either in further conversion processes or to be stored as chemical (e.g. hydrogenation of oil) or energy carrier for other applications (e.g. hydrogen fuel cells).

Furthermore, high production of char (equal to 28 wt%) was obtained from TCR. It was found to be rich in carbon and exhibited good catalytic effects as suggested by the high percentage of syngas and its low hydrogen and oxygen contents. This result also suggests that char from TCR could be used for combustion due to its HHV (25.94 MJ/kg) being higher than the initial feedstock.

Despite the lowest mass yields, pyrolysis oil showed good potential as a fuel even without upgrading, if it would require further upgrading (hydrotreatment) would be implemented to completely remove nitrogen, oxygen, and sulphur content as well as convert phenols and furans compounds into hydrocarbons. In this way, it could be used either as a drop-in fuel or blended with other conventional fuels in case it met fossil fuel standards EN 228 and EN 590 for use in vehicle engines. Overall, TCR was shown to be a promising thermochemical process for the valorisation of such material, since it offered a novel method to produce high-quality products from SGL.

CRedit authorship contribution statement

Francesca Di Gruttola: Conceptualization, Methodology, Validation, Investigation, Roles, Writing – original draft, Writing – review & editing, Visualization. **Hessam Jahangiri:** Conceptualization, Validation, Writing – review & editing. **Marcin Sajdak:** Writing – review & editing. **Artur Majewski:** Methodology, Resources, Writing – review & editing. **Domenico Borello:** Conceptualization, Methodology, Investigation, Writing – review & editing, Supervision. **Andreas Hornung:** Conceptualization, Methodology, Supervision. **Miloud Ouadi:** Conceptualization, Methodology, Validation, Investigation, Resources, Writing – review & editing, Supervision, Project administration.

Declaration of competing interest

The authors declare that they have no known competing financial

interests or personal relationships that could have appeared to influence the work reported in this paper.

Data availability

No data was used for the research described in the article.

Acknowledgements

The authors would like to thank ATETA for its support and funds during the work. The authors would also like to thank Nat Macaulay, Managing Director at JCM Fine Joinery to provide the material used for the TCR experiments.

References

- Alamia, A., Larsson, A., Breitholtz, C., Thunman, H., Nov 2017. Performance of large-scale biomass gasifiers in a biorefinery, a state-of-the-art reference. *Int. J. Energy Res.* 41 (14), 2001–2019.
- Anil, K.M., Amith, A., Kiran, K.M., Rajeev, K.S., 2018. Chapter 9 - lignocellulosic biorefinery wastes, or resources? *Waste Biorefinery Potential and Perspectives* 267–297.
- Argudo-Santamaria, J., Ortiz, H., Cano, B., Auclair, I., Silva, M., Palomino, J., Fernández, F., Garcia, S., Pham, T., Ramirez, A., 2020. Production and Applications of Pyrolytic Oil and Char from Lignocellulosic Residual Biomass. *Valorization of Biomass to Value-Added Commodities*, pp. 261–284.
- <http://www.pollutek-gasanalysis.com/files/Portable-GAS-3100P-Syngas-Analyser—EN17v3.pdf>. (Accessed 14 June 2022).
- Available online: <https://pubchem.ncbi.nlm.nih.gov/> (accessed on 14/June/2022).
- Asif Bashir, M., Jahangiri, H., Hornung, A., Ouadi, M., 2020. Deoxygenation of bio-oil from calcium-rich paper-mill waste. *Chem. Eng. Technol.* 44 (1), 194–202.
- Bashira, M.A., Lima, S., Jahangiri, H., Majewski, A.J., Hofmann, M., Hornung, A., Ouadi, M., 2022. A step change towards sustainable aviation fuel from sewage sludge. *J. Anal. Appl. Pyrol.* 163, 105498.
- Batuer, A., Chen, D., Yin, L., Feng, Y., 2019. Correlation between mechanical properties and thermochemical behaviours of waste papers in their early devolatilization stage. *J. Anal. Appl. Pyrol.* 137, 128–137.
- Bijok, N., Fiskari, J., Gustafson, R.R., Alopaeus, V., 2022. Modelling the kraft pulping process on a fibre scale by considering the intrinsic heterogeneous nature of the lignocellulosic feedstock. *Chem. Eng. J.* 438, 135548.
- Bridgwater, A.V., 2012. Review of fast pyrolysis of biomass and product upgrading. *Biomass Bioenergy* 38, 68–94.
- Bridgwater, A.V., Meier, D., Radlein, D., 1999. An overview of fast pyrolysis of biomass. *Org. Geochem.* 30 (Issue 12), 1479–1493.
- Cerruti, E., Di Gruttola, F., Lauro, G., Valentini, T.D., Fiaschi, P., Sorrenti, R., Borello, D., 2020. Assessment of feedstocks and technologies for advanced biofuel production. *E3S Web of Conf.* 197, 05002, 75th National ATI Congress.
- Channiwala, S.A., Parikh, P.P., 2002. A unified correlation for estimating HHV of solid, liquid and gaseous fuels. *Fuel* 81, 1051–1063.
- Cheng, S., Wei, L., Zhao, X., Julson, J., 2016. Application, deactivation, and regeneration of heterogeneous catalysts in bio-oil upgrading. *Catalysts* 6, 195.
- Di Gruttola, F., Borello, D., 2021. Analysis of the EU secondary biomass availability and conversion processes to produce advanced biofuels: use of existing databases for assessing a metric evaluation for the 2025 perspective. *Sustainability* 13, 7882.
- Fivga, A., Jahangiri, H., Bashir, M.A., Majewski, A.J., Hornung, A., Ouadi, M., 2020. Demonstration of catalytic properties of de-inking sludge char as a carbon based sacrificial catalyst. *J. Anal. Appl. Pyrol.* 146, 104773.
- Gas Analysis in Gasification of Biomass and Waste, 2018. IEA Bioenergy.
- Girods, P., Dufour, A., Rogaume, Y., Rogaume, C., Zoulalian, A., 2008. Thermal removal of nitrogen species from wood waste containing urea formaldehyde and melamine formaldehyde resins. *J. Hazard Mater.* 159, 210–221 available online: https://www.academia.edu/29694004/Thermal_removal_of_nitrogen_species_from_wood_waste_containing_urea_formaldehyde_and_melamine_formaldehyde_resins. (Accessed 15 March 2022).
- Hao, L., Mahdi, M.A.-O., 2017. Chemicals from Lignin. *Encyclopedia of Sustainable Technologies*, pp. 573–585.
- Hornung, A., et al., 2009. The Thermal Treatment of Biomass. Great Britain Patent Application Number: GB 0808739.7: Application submitted: May 15, 2009, World Patent Applied for (WO 2009/138757; November 19, 2009).
- Hornung, A., Apfelbacher, A., 2009. Thermal Treatment of Biomass. UK patent application GB2460156A <http://worldwide.espacenet.com/publicationDetails/biblio?FT=D&date=20110330&DB=EPODOC&locale=en-EP&CC=EP&NR=2300560A2&KC=A2&ND=4>.
- Hornung, A., Jahangiri, H., Ouadi, M., Kick, C., Deinert, L., Meyer, B., Grunwald, J., Daschner, R., Apfelbacher, A., Meiller, M., Eder, S., 2022. Thermo-Catalytic Reforming (TCR)—An important link between waste management and renewable fuels as part of the energy transition. *Appl. Energy and Combust. Sci.* 12. <https://cfa.org.uk/userfiles/files/Zero%20Avoidable%20Waste%20in%20Flooring%20-%20A%20Scoping%20Study.pdf>. (Accessed 12 September 2022).
- <https://en.polyrey.com/sites/polyrey/files/docs/resources/ENV-EN-REYSIPUR-20160922.pdf>. (Accessed 4 May 2022).

- <https://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:32018L2001&from=EN>. (Accessed 5 May 2022).
- https://www.engineeringtoolbox.com/fuels-higher-calorific-values-d_169.html, 03/0502022.
- Jahangiri, H., Santos, J., Hornung, A., Ouadi, M., 2021. Thermochemical conversion of biomass and upgrading of bio-products to produce fuels and chemicals. *Catal. Clean Energy and Environ. Sustain.* 1–47.
- Jardim, J.M., Hart, P.W., Lucia, L.A., Jameel, H., Chang, H., 2022. The effect of the kraft pulping process, wood species, and pH on lignin recovery from black liquor. *Fibers* 10–16.
- Jux, J.T., North, A.M., Kay, R., 1974. Dielectric properties of standard and modified electrical grade phenol-formaldehyde resin-paper laminates. *Polym. (Guildf)* 15, 799–804.
- Lepedat, K., Wagner, R., Lang, J., 2010. Laminates. In: Pilato, L. (Ed.), *Phenolic Resins A Century Prog.* Springer, Berlin, Heidelberg, pp. 243–261.
- Machineni, L., 2020. Lignocellulosic biofuel production: review of alternatives, biomass conversion and biorefinery. *Biomass Convers. Biorefinery* 10, 779–791.
- Neeft, J.P.A., Knoef, H.A.M., Buffinga, G.J., Zielke, U., Sjöström, K., Brage, C., Hasler, P., Smell, P.A., Suomalainen, M., Dorrington, M.A., Greil, C., Bridgwater, A.V. (Eds.), 2008. *Progress in Thermochemical Biomass Conversion*.
- Net Zero by 2050: A Roadmap for the Global Energy Sector, 2021. International Energy Agency.
- Neumann, J., Meyer, J., Ouadi, M., Apfelbacher, A., Binder, A., Hornung, A., 2016. The conversion of anaerobic digestion waste into biofuels via a novel Thermo-Catalytic Reforming process. *J. Waste Manag.* 47, 141–148.
- Ouadi, M., Brammer, J.G., Yang, Y., Hornung, A., Kay, M., 2013. The intermediate pyrolysis of de-inking sludge to produce a sustainable liquid fuel. *J. Anal. Appl. Pyrol.* 102, 24–32.
- Ouadi, M., Asif Bashir, M., Galileu Speranza, L., Jahangiri, H., Hornung, A., 2019. Food and market Waste—A pathway to sustainable fuels and waste. *Valorization Energy Fuels* 33, 9843–9850.
- Paethanom, A., Nakahara, S., Kobayashi, M., Prawisudha, P., Yoshikawa, K., 2012. Performance of tar removal by absorption and adsorption for biomass gasification. *Fuel Process. Technol.* 104, 144–154.
- Pizzi, A., Mittal, K.L., 2003. *Handbook of adhesive technology*. In: Revised and Expanded, second ed. Marcel Dekker, New York, Basel.
- Prasad, S., Ingle, A.P., 2019. Chapter 12 - Impacts of Sustainable Biofuels Production from Biomass. *Sustainable Bioenergy Advances and Impacts*, pp. 327–346.
- Resende, F.L.P., 2014a. Chapter 1 - Reactor Configurations and Design Parameters for Thermochemical Conversion of Biomass into Fuels, Energy, and Chemicals, Editor (s): Fan Shi, *Reactor and Process Design in Sustainable Energy Technology*. Elsevier, pp. 1–25.
- Resende, F.L.P., 2014b. Energy, and Chemicals, Reactor and Process Design in Sustainable Energy Technology, pp. 1–25 (Chapter 1) - Reactor configurations and design parameters for thermochemical conversion of biomass into fuels.
- Ronsse, F., Nachenius, R.W., Prins, W., 2015. Chapter 11 - Carbonization of Biomass, *Recent Advances in Thermo-Chemical Conversion of Biomass*. Elsevier, pp. 293–324.
- Santos, J., Ouadi, M., Jahangiri, H., Hornung, A., 2020a. Valorisation of lignocellulosic biomass investigating different pyrolysis temperatures. *J. Energy Inst.* 93 (Issue 5), 1960–1969.
- Santos, J.J., Ouadi, M., Jahangiri, H., Hornung, A., 2020b. Thermochemical conversion of agricultural wastes applying different reforming temperatures. *Fuel Process. Technol.* 203, 106402.
- Santos, J., Jahangiri, H., Asif Bashir, M., Hornung, A., Ouadi, M., 2020c. The upgrading of bio-oil from the intermediate pyrolysis of waste biomass using steel slag as a catalyst. *ACS Sustainable Chem. Eng.* 8 (50), 18420–18432.
- Sattara, A., Leeke, G.A., Hornung, A., Wood, J., 2014. Steam gasification of rapeseed, wood, sewage sludge and miscanthus biochars for the production of a hydrogen-rich syngas. *Biomass Bioenergy* 69, 276–286.
- Schmitt, N., Apfelbacher, A., Jäger, N., Daschner, R., Stenzel, F., Hornung, A., 2019. Thermo-chemical conversion of biomass and upgrading to biofuel: the Thermo-Catalytic Reforming process – a review. In: *Biofuels, Bioproducts and Biorefining*, vol. 13. John Wiley & Sons, Ltd, pp. 822–837.
- Shoji, T., Kawamoto, H., Saka, S., 2014. Boiling point of levoglucosan and devolatilization temperatures in cellulose pyrolysis measured at different heating area temperatures. *J. Anal. Appl. Pyrol.* 109, 185–195.
- Speight, J.G., 2020. 2 - introduction to refining processes. In: *The Refinery of the Future*, second ed., pp. 43–84.
- Tanger, P., Field, J.L., Jahn, C.E., DeFoort, M.W., Leach, J.E., 2013. Biomass for thermochemical conversion: targets and challenges. *Front. Plant Sci. Sec. Plant Biotechnology* 4, 2013.
- Tesfa, B., Mishra, R., Gu, F., Powles, N., 2010. Prediction models for density and viscosity of biodiesel and their effects on fuel supply system in CI engines. *Renew. Energy* 35 (12), 2752–2760.
- Thébault, M., Kandelbauer, A., Zikulnig-Rusch, E., Putz, R., Jury, S., Eicher, I., 2018. Impact of phenolic resin preparation on its properties and its penetration behavior in Kraft paper. *Eur. Polym. J.* 104, 90–98.
- Tobiason, F.L., 1990. Phenolic resin adhesives. In: *Handb. Adhes.* Springer US, Boston, MA, pp. 316–340.
- Torres-Herrador, F., Eschenbacher, A., Coheur, J., Blondeau, J., Magin, T.E., Van Geem, K.M., 2021. Decomposition of carbon/phenolic composites for aerospace heatshields: detailed speciation of phenolic resin pyrolysis products. *Aero. Sci. Technol.* 119, 107079.
- Trif-Tordai, G., Ionel, I., 2011. Waste Biomass as Alternative Bio-Fuel - Co-firing versus Direct Combustion, *Alternative Fuel*. <https://www.intechopen.com/chapters/17594>. (Accessed 8 September 2022).
- Uddin, M.N., Daud, W.M.A.W., Abbas, H.F., 2014. Effects of pyrolysis parameters on hydrogen formations from biomass: a review. *RSC Adv.* 4, 10467–10490.
- Xiang, H., Xin, R., Prasongthum, N., Natewong, P., Sooknoi, T., Wang, J., Reubroycharoen, P., Fan, X., 2022. Catalytic conversion of bioethanol to value-added chemicals and fuels: a review. *Resour. Chem. Mater.* 1 (1), 47–68.
- Yang, H.P., Yan, R., Chen, H.P., Lee, D.H., Zheng, C.G., 2007. Characteristics of hemicellulose, cellulose and lignin pyrolysis. *Fuel* 86, 1781–1788.
- Yang, X., Berthold, F., Berglund, L.A., 2018. Preserving cellulose structure: delignified wood fibers for paper structures of high strength and transparency. *Biomacromolecules* 19, 3020–3029.
- Zheng, Y., Wang, J., Wang, D., Zheng, Z., 2022. Advanced catalytic upgrading of biomass pyrolysis vapor to bio-aromatics hydrocarbon: a review. *Appl. Energy and Combust. Sci.*, 100061.